



STANDARD DETAILS



FOR USE WITH THE 2025 FORTIFIED HOME STANDARD

Hurricane and High Wind

FORTIFIED Home Standard Details – Roof Set

For use with the 2025 FORTIFIED Home™ Standard

Table of Contents

Detail Number	Detail Title	Applicable Level		
		Roof	Silver	Gold
F-DE-1	Hurricane and High Wind - Drip Edge Installation Over Underlayment	✓	✓	✓
F-G-1	Corrosion Protection Requirements	✓	✓	✓
F-G-2	Roof and Wall Zone Diagram	✓	✓	✓
F-GS-1	Temporary Gable Vent Shuttering	✓	✓	✓
F-RC-1	Asphalt Shingle Installation Guidance for Steep Slope - Option 1: Peel and Stick Starter Strip Installation at Eave or Rake	✓	✓	✓
F-RC-2	Asphalt Shingle Installation Guidance for Steep Slope - Option 2: Shingle Strip Starter Installation at Eave or Rake	✓	✓	✓
F-RC-3	Asphalt Shingle Installation Guidance for Steep Slope - Option 3: Shingles Set Directly in Flashing Cement at Rake Only	✓	✓	✓
F-RR-1	Re-Roofing Deck Replacement Fastening Detail	✓	✓	✓
F-RR-2	Re-Roofing New Scab Member Detail for Damaged or Deteriorated Wood Framing Member	✓	✓	✓
F-RR-3	Hurricane and High Wind- Re-Nailing the Roof Deck (Wood Structural Panels)	✓	✓	✓
F-RR-5	Fastening Wood Structural Panel Roof Sheathing Over Existing 1x Roof Deck Boards with Gaps	✓	✓	✓
F-RS-1	Roof Deck Attachment - Sawn Lumber or Wood Board Roof Deck with No Gaps	✓	✓	✓
F-RS-2	Hurricane and High Wind - New Construction Roof Deck Attachment - Structural Wood Panels	✓	✓	✓
F-SRD-1	Roof Deck Attachment and Sealed Roof Deck from Within Using Spray Foam	✓	✓	✓
F-SRD-2	Steep Slope Sealed Roof Deck - Flashing Tape and Underlayment- Shingle or Metal Roof Covers	✓	✓	✓
F-SRD-2A	Steep Slope Sealed Roof Deck - Flashing Tape and Underlayment- Shingle or Metal Roof Covers Using 40 to 42 Inchwide Synthetic Underlayment	✓	✓	✓
F-SRD-2B	Steep Slope Sealed Roof Deck - Flashing Tape and Underlayment- Shingle or Metal Roof Covers Using 48 Inchwide Synthetic Underlayment	✓	✓	✓
F-SRD-2C	Steep Slope Sealed Roof Deck - Flashing Tape and Underlayment- Shingle or Metal Roof Covers Using 60 Inchwide Synthetic Underlayment	✓	✓	✓
F-SRD-3	Steep Slope Sealed Roof Deck - Two Layers Felt Underlayment - Shingle or Metal Roof Covers	✓	✓	✓
F-SRD-4	Steep Slope Sealed Roof Deck - Self-Adhered Membrane (Showing Bond Break for Asphalt Shingles) - Shingle and Metal Roof Covers	✓	✓	✓
F-SRD-5	Steep Slope Sealed Roof Deck - Flashing Tape, Underlayment and Roof Tile Cap Sheet - Concrete and Clay Tile Roof Covers	✓	✓	✓
F-SRD-6	Steep Slope Sealed Roof Deck - Self-Adhered Membrane - Concrete and Clay Tile Roof Covers	✓	✓	✓
F-SRD-7	Steep Slope Sealed Roof Deck – Two Layers Synthetic Underlayment (40" and 48" Wide Rolls)	✓	✓	✓
F-SRD-8	Steep Slope Sealed Roof Deck – Two Layers Synthetic Underlayment (60" Wide Roll)	✓	✓	✓

FORTIFIED Home Standard Details

Naming Convention

FORTIFIED Home Standard Detail numbers are comprised of three alphanumeric identifications to provide general categorization:

1. First alphabetic identification – FORTIFIED Detail:
 - a. F = FORTIFIED
2. Second alphabetic identification – Secondary Category
 - a. G = General Information
 - b. RS = Roof Sheathing
 - c. SRD = Sealed Roof Deck
 - d. DE = Drip Edge
 - e. RC = Roof Cover
 - f. RR = Re-Roof
 - g. GS = Gable Shuttering
 - h. GE = Gable End
 - i. S = Soffit
 - j. CTD = Chimney Tie Down
3. Numeric identification – chronological order detail was completed

Example: F-RS-1

Fortified Detail → **R**oof **S**heathing Detail → First (**1**) Detail in this category


GENERAL NOTES:

1. REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION. REFER TO FORTIFIED STANDARD DETAIL F-G-1 FOR CORROSION PROTECTION REQUIREMENTS. BEST PRACTICES TO SEAL THE DRIP EDGE: SHINGLE ROOF COVERS: SEAL THE DRIP EDGE, UNDERLAYMENT AND STARTER STRIP AT THE EAVE BY EITHER USING A SELF-ADHERING STARTER STRIP OR APPLYING AN 8" WIDE LAYER OF COMPATIBLE FLASHING CEMENT WITH 1/8" MAX. THICKNESS OVER THE DRIP EDGE AND UNDERLAYMENT.
2. FOR METAL ROOF COVERS: APPLY A COMPATIBLE MANUFACTURER-APPROVED SEALANT BETWEEN THE DRIP EDGE AND ADJACENT UNDERLAYMENT TO PREVENT WATER FROM ACCUMULATING UNDER THE DRIP EDGE OR USE A MANUFACTURER APPROVED 4" SELF-ADHERED SEAM TAPE.
3. APPLICABLE FOR ROOF PITCH 2:12 OR GREATER. FOR ROOF SLOPES LESS THAN 2:12, REFER TO MANUFACTURERS DRIP EDGE INSTALLATION REQUIREMENTS.
4. FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.
5. METAL DRIP EDGE (MINIMUM 26 GAUGE FOR STEEL) ALONG ALL EAVES AND GABLE RAKE EDGES INSTALLED OVER UNDERLAYMENT. MAKE SURE THE TOP SURFACE OF THE DRIP EDGE IS CLEAN, FREE OF OIL, AND IF REQUIRED BY THE STARTER STRIP MANUFACTURER, PRIMED WITH ASTM D41 PRIMER. FOR SEALING THE DRIP EDGE REFER TO GENERAL NOTE #3.

EXCEPTION: ASTM D1970 SELF-ADHERED MEMBRANE INSTALLED PER F-SRD-4 MAY BE INSTALLED OVER THE DRIP EDGE AT EAVES PROVIDED THE TOP SURFACE OF THE DRIP EDGE IS CLEAN, FREE OF OIL, AND PRIMED WITH ASTM D41 PRIMER PER MANUFACTURER REQUIREMENTS.

FASTENERS SHALL BE GALVANIZED STEEL, STAINLESS STEEL, ALUMINUM OR COPPER ROOFING NAILS. MINIMUM 12-GAGE [0.105 INCH (3MM)] SHANK WITH A MINIMUM 3/8-INCH-DIAMETER (9.5MM) HEAD, COMPLYING WITH ASTM F1667 AS SPECIFIED IN SECTION R905.2.5 OF THE 2024 IRC. CAP NAILS AND STAPLES ARE NOT ALLOWED.

UNDERLAYMENT INSTALLED IN ACCORDANCE WITH FORTIFIED HOME STANDARD REQUIREMENTS

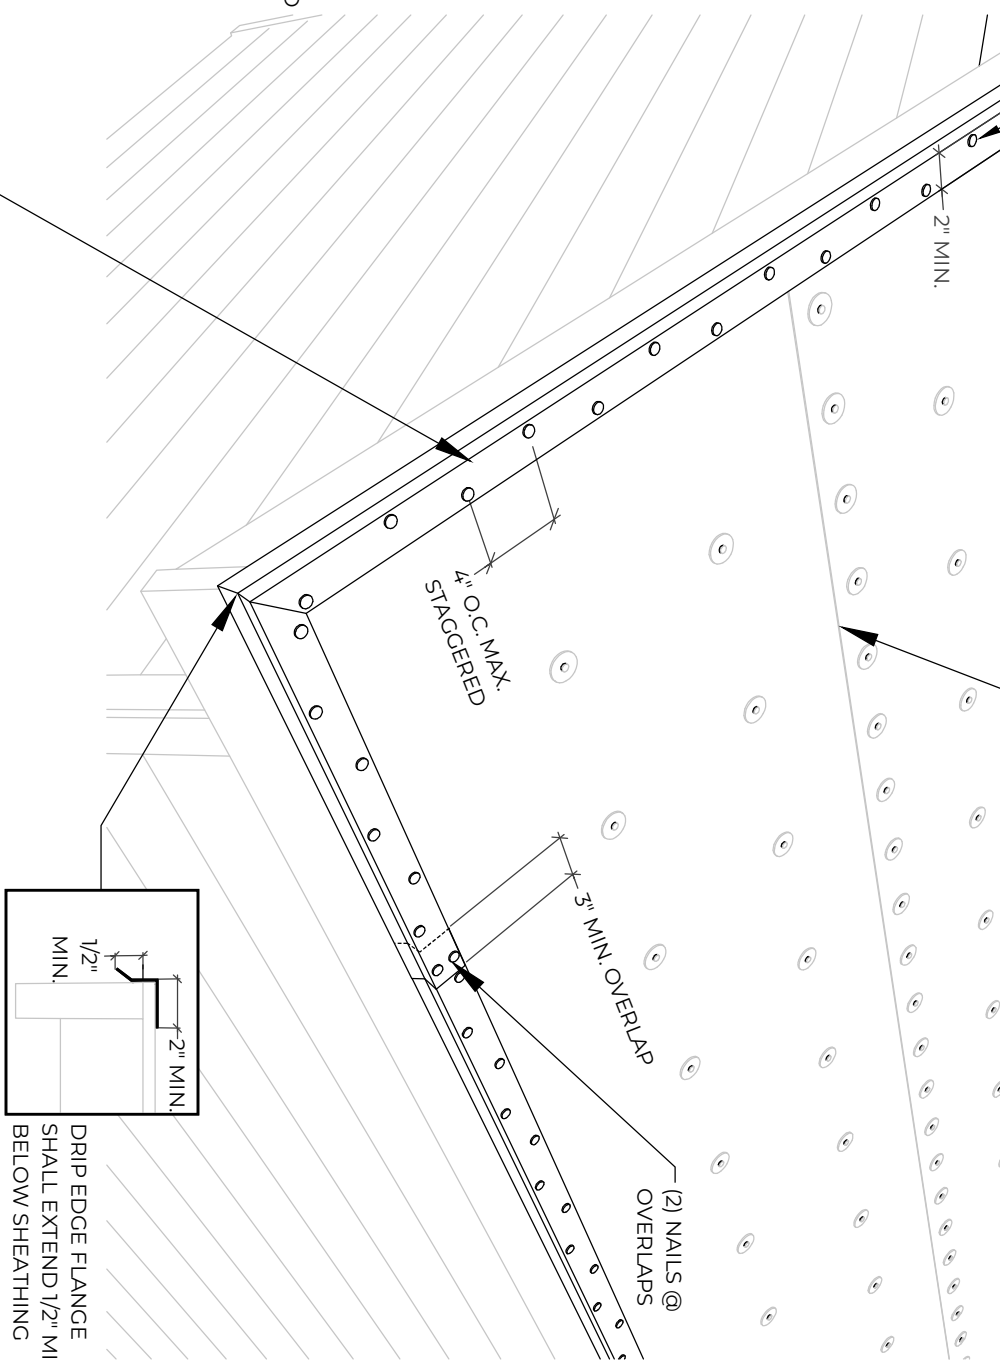

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

HURRICANE AND HIGH WIND - DRIP EDGE
INSTALLATION OVER UNDERLAYMENT

DRAWING #:

F-DE-1

DATE: 11/01/2024



Corrosion Protection Requirements for Fasteners & Connectors in Coastal Regions

For all connections described in this table: if corrosion is observed at time of re-designation, designation may not be renewed.



APPLICABLE STANDARDS:
FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION #:

CORROSION PROTECTION
REQUIREMENTS

DRAWING #:

DATE:

11/01/2024

F-C-1

Requirements & Best Practices for FORTIFIED Roof™ Designations

	REQUIREMENTS		BEST PRACTICES
	Distance to saltwater shoreline ¹		Distance to brackish water shoreline
ROOF CONNECTIONS	0-300 ft	300-3000 ft	0-300 ft
Roofing nails for shingles	Category A	Category B (or better)	Category B (or better)
Concrete and clay roof tile fasteners			
Roof vent fasteners			
Metal roof system including panels and exposed fasteners, clips, etc.	Follow manufacturer's corrosion resistance guidance for coastal areas. If not provided by manufacturer, the following corrosion resistance categories may be accepted for exposed fasteners and clips		
	Category A	Category B (or better)	
Fasteners used for attachment of underlayment to roof deck	Category B (or better)		
Roof-mounted equipment exposed connections and fasteners	Category A	Category B (or better)	

Requirements and Best Practices for FORTIFIED Silver™ and FORTIFIED Gold™ Designations

		REQUIREMENTS		BEST PRACTICES	
EXTERIOR EXPOSED CONNECTIONS (including under soffits and elevated foundations)		Distance to saltwater shoreline ¹		Distance to brackish water shoreline	
		0-300 ft	300-3000 ft	0-300 ft	
Silver: - Soffit fasteners - Exposed attached structure connectors, anchors, fasteners		Category A	Category B (or better)	Category B (or better)	
Gold: Exposed CLP connectors, anchors, fasteners		Aluminum Soffits NOT Allowed	Aluminum Soffits Allowed		
		BEST PRACTICES		BEST PRACTICES	
INTERIOR CONNECTIONS (including enclosed in attic or within wall cavity)		Distance to saltwater shoreline ¹		Distance to brackish water shoreline	
		0-300 ft	300-3000 ft	0-300 ft	
Silver: - Gable bracing metal connectors and fasteners - Gable outlooker hangers, clips and fasteners - Chimney framing metal connectors and fasteners		Category B (or better)		Category C (or better)	
Gold: Enclosed CLP connectors, anchors, fasteners		Category C (or better)			

Corrosion Resistance Categories^{2,3}

CATEGORY A - STAINLESS STEEL OR EQUIVALENT	CATEGORY B - ENHANCED GALVANIZED OR EQUIVALENT
<u>Metal connectors:</u> - Stainless steel per ASTM A316 <u>Fasteners:</u> - Stainless steel per ASTM A304 or A316 - Proprietary coated fasteners require documentation of equivalent corrosion protection performance to stainless steel, such as equivalence testing per ICC-ES AC257 Exposure Condition 4, or other comparative testing documentation	<u>Metal connectors:</u> - Galvanized per ASTM A653 with G185 coating - Hot-dip galvanized per ASTM A123 <u>Fasteners with diameters over 3/8 in.:</u> - Hot-dip galvanized per ASTM A153 Class C <u>Fasteners with diameters up to 3/8 in. shall meet one of the following:</u> - Hot-dip galvanized per ASTM A153 Class D - Galvanized per ASTM A641 Class 3 - Per ASTM G85, Annex 5, Corrosion resistance exhibiting not more than 5% red rust after the following: - for nails: 280 hours - for roof tile fasteners: 1000 hours - for other carbon steel fasteners: 360 hours - In lieu of testing listed above, proprietary coated fasteners require documentation of equivalent or superior corrosion protection performance to the galvanization options listed above, such as equivalence testing per ICC-ES AC257 Exposure Condition 4, or other comparative testing documentation - Testing per ASTM B117 with corrosion resistance exhibiting not more than 5% red rust after 1,000 hours exposure may be accepted if no other testing is available
CATEGORY C - STANDARD GALVANIZED	
<u>Metal connectors:</u> - Galvanized per ASTM A653 with G90 coating <u>Fasteners:</u> - Galvanized per ASTM A641 Class 1	




NOTES

- For the purposes of FORTIFIED Home designation, "saltwater shoreline" shall be considered as the ocean or gulf coastline along the mainland United States including seaward island coastlines. This includes the Atlantic, Pacific, and Gulf of Mexico coastlines, as well as the coastline of any Bay or Sound with no land barrier separating it from being completely open to the ocean or Gulf of Mexico. Distances are measured from the closest feature of the subject building to the ocean or gulf coastline.
- Fastener and connector materials and coatings must be compatible with materials and coatings they come into contact with to prevent galvanic corrosion due to dissimilar materials.
- Fasteners in contact with chemically treated wood shall be in accordance with the requirements of the IBC/IRC or locally adopted code as applicable.


INTERIOR ZONES
ROOFS - ZONE 1/ WALLS - ZONE 4

END ZONES
ROOFS - ZONE 2/ WALLS - ZONE 5

CORNER ZONES
ROOFS - ZONE 3

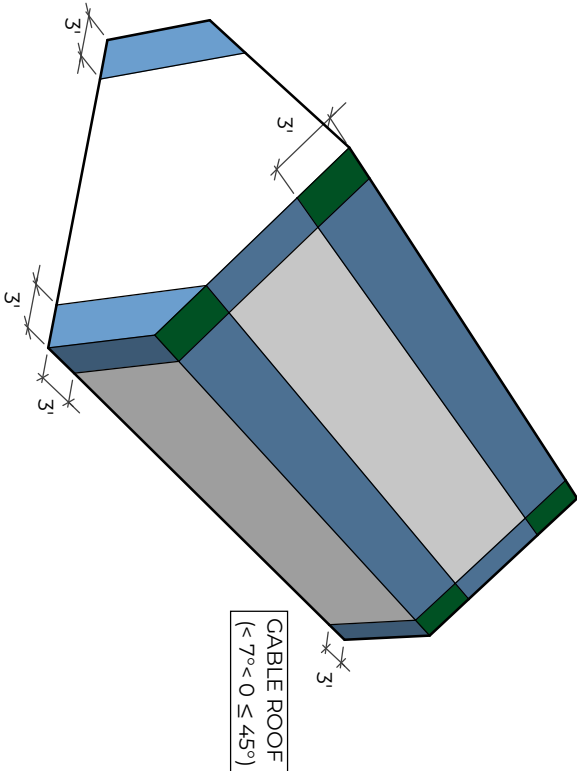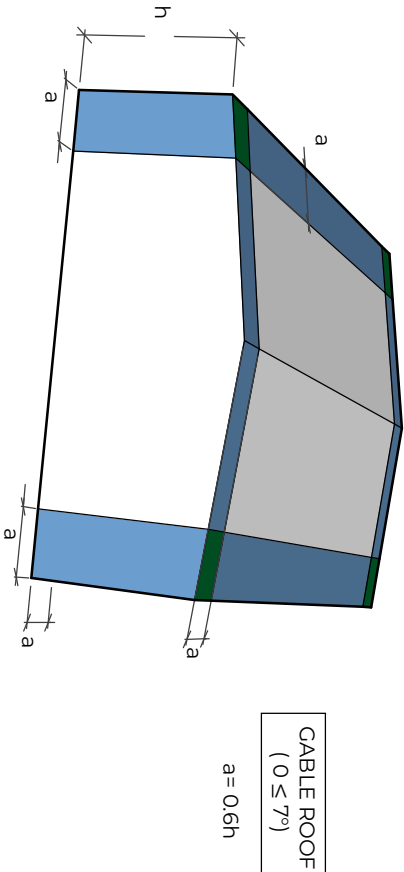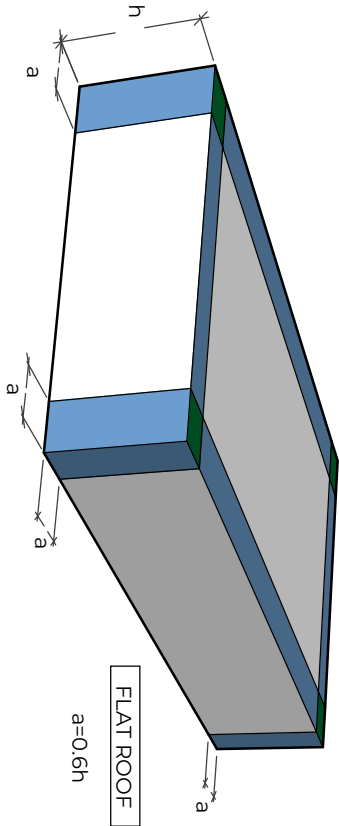

1. GENERAL NOTES:
REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION.
FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL,
STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE
STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN
PROVISIONS, USE WHICHEVER IS MORE STRINGENT.
- 2.

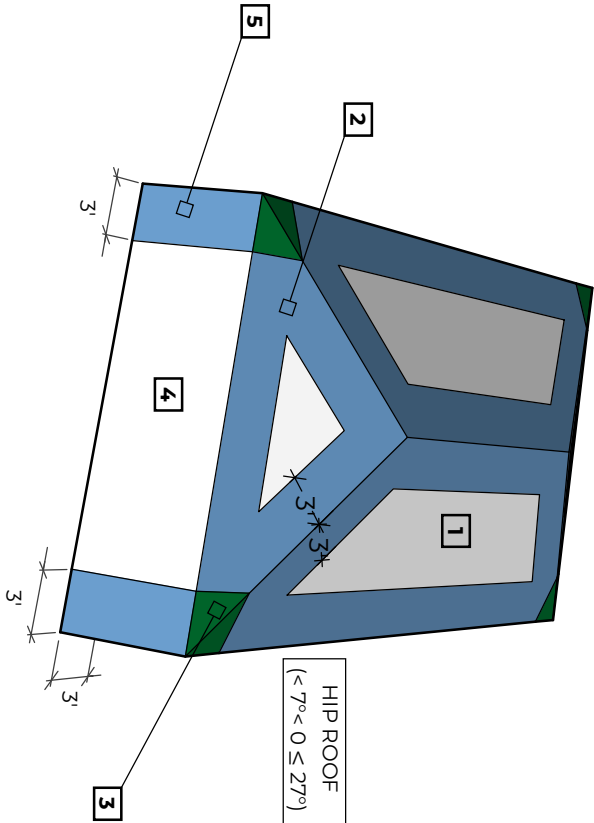

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

ROOF AND WALL ZONE DIAGRAM

DRAWING #:


F-G-2

DATE: 11/01/2024



- GENERAL NOTES:
- REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION.
 - REFER TO FORTIFIED STANDARD DETAIL F-G-1 FOR CORROSION PROTECTION REQUIREMENTS.
 - TO MAINTAIN PROPER ATTIC VENTILATION, VENT SHUTTERING MAY BE PERFORMED ON A TEMPORARY BASIS ONLY AND SHUTTERS ARE TO BE REMOVED AFTER A STORM THREAT IS OVER. ADEQUATE ATTIC VENTILATION MUST BE MAINTAINED ON A REGULAR BASIS.**
 - FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.

WOOD STRUCTURAL PANEL OR OTHER NONPOROUS
FLAT SHUTTER CUT TO FIT W/ 7/16" MIN. THICKNESS.
PRE-DRILL HOLES AT FASTENER LOCATIONS. SHAPE
MAY VARY, BUT NOT TO EXCEED MAX. DIMENSIONS
AND FASTENER SPACING SHOWN.

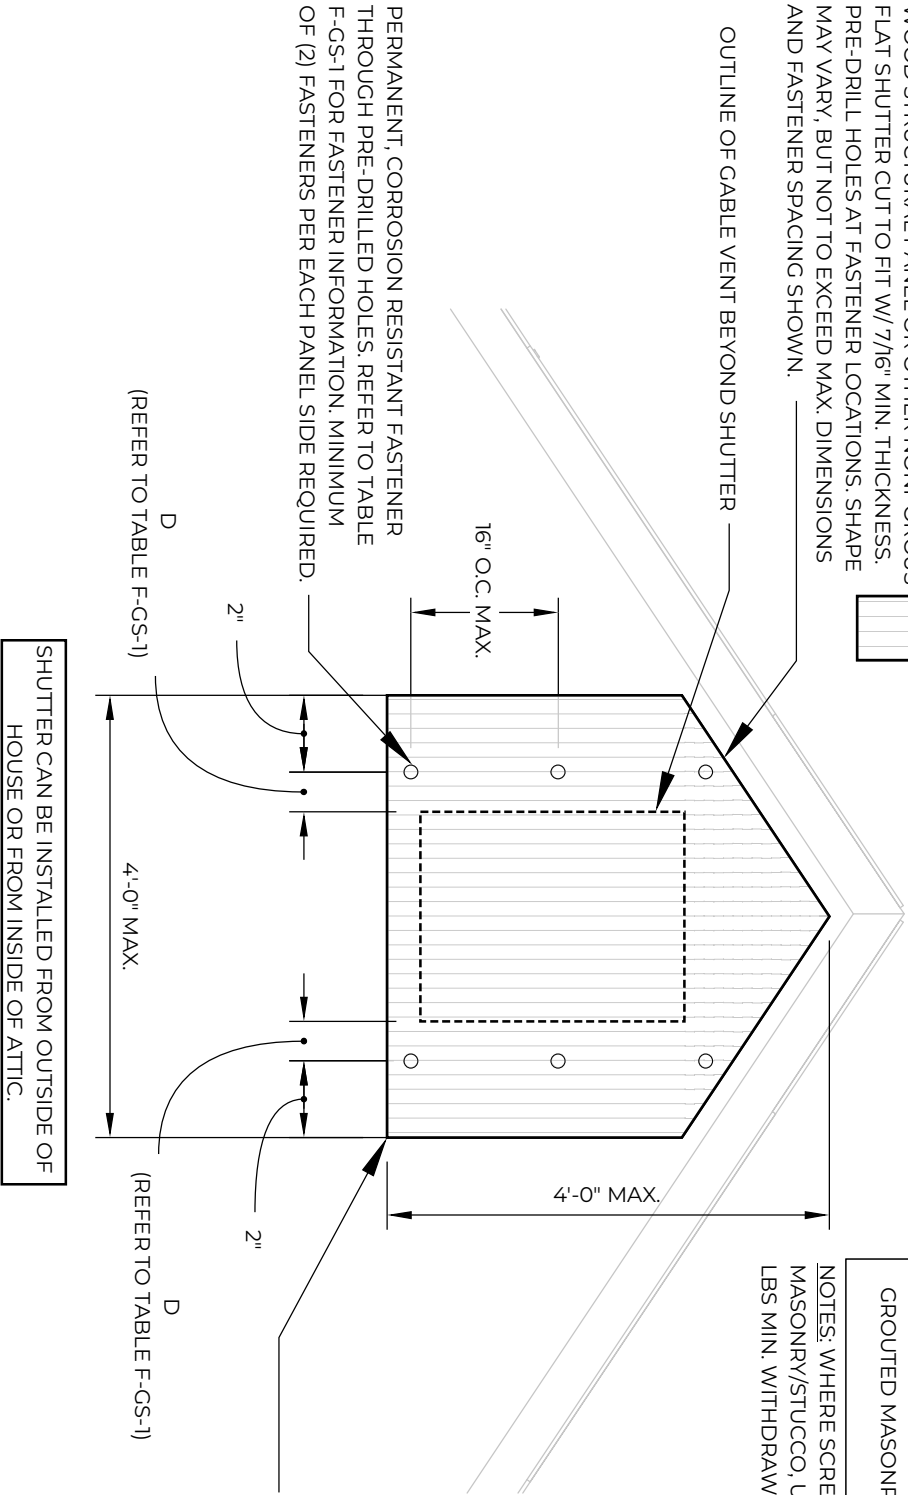

NOTE: SELF-ADHESIVE WEATHER
STRIPPING CAN BE USED TO SEAL THE
SHUTTERS TO THE TRIM BOARDS AROUND
VENT EDGES. IF SHUTTER IS INSTALLED ON
INSIDE OF ATTIC, ENSURE THAT ANY
WATER THAT ACCUMULATES IN THE
CAVITY CAN DRAIN TO THE OUTSIDE OF
THE HOUSE AND NOT INTO THE WALL
BELOW.

TABLE F-GS-1: FASTENING SCHEDULE FOR CABLE VENT COVER.

SUPPORT STRUCTURE TYPE	FASTENER TYPE & SIZE	END DISTANCE, D
WOOD	1/4" Ø LAG SCREWS W/ 2" EMBEDMENT & 1" Ø WASHER	1"
CONCRETE OR GROUTED MASONRY	1/4" Ø FASTENER W/ 2" EMBEDMENT & 1" Ø WASHER	2.5"

NOTES: WHERE SCREWS ARE ATTACHED TO MASONRY OR
MASONRY/STUCCO, USE VIBRATION-RESISTANT ANCHORS W/ 1500
LBS MIN. WITHDRAWAL CAPACITY.

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)

DESCRIPTION:

TEMPORARY CABLE VENT SHUTTERING

DRAWING #:

F-GS-1

DATE:

11/01/2024



GENERAL NOTES:

1. REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION.
2. SHINGLES INSTALLED AT ALL INTERSECTIONS AND BOTH SIDES OF OPEN VALLEYS SHALL BE SET IN A MINIMUM 8 IN. WIDE STRIP OF FLASHING CEMENT (MAX. THICKNESS OF FLASHING CEMENT = 1/8"). CUT SIDE OF CLOSED VALLEYS SHALL BE SET IN A MINIMUM 2 IN. WIDE, 1/8" THICK STRIP OF FLASHING CEMENT. WOVEN VALLEYS TO BE ACCORDING TO THE MANUFACTURER'S SPECIFICATIONS.
3. REFER TO FORTIFIED STANDARD DETAILS F-RC-2 AND F-RC-3 FOR ADDITIONAL ASPHALT SHINGLE INSTALLATION OPTIONS. FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.
- 4.

UNDERLAYMENT INSTALLED PER FORTIFIED HOME STANDARD REQUIREMENTS.

SHINGLE MANUFACTURER APPROVED ASTM D1970 FULLY ADHERED STARTER STRIP WITH ASPHALTIC ADHESIVE STRIP AT EAVE.

D RIP EDGE AND ASTM D41 ASPHALT PRIMER INSTALLED PER FORTIFIED STANDARD DETAIL F-DE-1.

STARTER STRIP AND SHINGLES SHALL NOT EXTEND MORE THAN 1/4" BEYOND DRIP EDGE.

ASTM D3161 (CLASS F) OR ASTM D7158 (CLASS H) ASPHALT SHINGLES INSTALLED PER MANUFACTURER RECOMMENDATIONS FOR HIGH WIND REGIONS.

TO MEET 2025 HAIL SUPPLEMENT REQUIREMENTS, ASPHALT SHINGLES MUST HAVE AN OVERALL IBHS ROOF SHINGLE HAIL IMPACT RATING OF "GOOD" OR "EXCELLENT" OR BE POLYMER-MODIFIED WITH EITHER A UL 2218 CLASS 4 OR FM 4473 CLASS 4 RATING.

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

ASPHALT SHINGLE INSTALLATION GUIDANCE FOR STEEP SLOPE - OPTION 1: PEEL AND STICK STARTER STRIP INSTALLATION AT EAVE OR RAKE

DRAWING #:

F-RC-1

DATE:

11/01/2024



GENERAL NOTES:

1. REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION.
2. SHINGLES INSTALLED AT ALL INTERSECTIONS AND BOTH SIDES OF OPEN VALLEYS SHALL BE SET IN A MINIMUM 8 IN. WIDE STRIP OF FLASHING CEMENT (MAX. THICKNESS OF FLASHING CEMENT = 1/8"). CUT SIDE OF CLOSED VALLEYS SHALL BE SET IN A MINIMUM 2 IN. WIDE, 1/8" THICK STRIP OF FLASHING CEMENT. WOVEN VALLEYS TO BE ACCORDING TO THE MANUFACTURER'S SPECIFICATIONS.
3. REFER TO FORTIFIED STANDARD DETAILS F-RC-1 AND F-RC-3 FOR ADDITIONAL ASPHALT SHINGLE INSTALLATION OPTIONS. FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.
- 4.

UNDERLAYMENT INSTALLED _____
PER FORTIFIED HOME
STANDARD REQUIREMENTS.

SHINGLE MANUFACTURER APPROVED _____
STARTER STRIP SET IN A MINIMUM 8 IN.
WIDE STRIP OF COMPATIBLE FLASHING
CEMENT (MAX. THICKNESS OF FLASHING
CEMENT = 1/8").

VERIFY WITH MANUFACTURER THAT _____
FLASHING CEMENT/ROOF MASTIC IS
COMPATIBLE WITH UNDERLAYMENT.

D RIP EDGE AND ASTM D41 ASPHALT
PRIMER INSTALLED PER FORTIFIED
STANDARD DETAIL F-DE-1.

STARTER STRIP AND SHINGLES _____
SHALL NOT EXTEND MORE THAN
1/4 IN. BEYOND DRIP EDGE.

ASTM D3161 (CLASS F) OR ASTM D7158
(CLASS H) ASPHALT SHINGLES
INSTALLED PER MANUFACTURER
RECOMMENDATIONS FOR HIGH WIND
REGIONS.

TO MEET 2025 HAIL SUPPLEMENT REQUIREMENTS,
ASPHALT SHINGLES MUST HAVE AN OVERALL IBHS
ROOF SHINGLE HAIL IMPACT RATING OF "GOOD" OR
"EXCELLENT" OR BE POLYMER-MODIFIED WITH EITHER
A UL 2218 CLASS 4 OR FM 4473 CLASS 4 RATING.

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

ASPHALT SHINGLE INSTALLATION
GUIDANCE FOR STEEP SLOPE -
OPTION 2: SHINGLE STRIP STARTER
INSTALLATION AT EAVE OR RAKE

DRAWING #:

F-RC-2

DATE:

11/01/2024



GENERAL NOTES:


- 1. REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION.
- 2. SHINGLES INSTALLED AT ALL INTERSECTIONS AND BOTH SIDES OF OPEN VALLEYS SHALL BE SET IN A MINIMUM 8 IN. WIDE STRIP OF FLASHING CEMENT (MAX. THICKNESS OF FLASHING CEMENT = 1/8"). CUT SIDE OF CLOSED VALLEYS SHALL BE SET IN A MINIMUM 2 IN. WIDE, 1/8" THICK STRIP OF FLASHING CEMENT. WOVEN VALLEYS TO BE ACCORDING TO THE MANUFACTURER'S SPECIFICATIONS.
- 3. REFER TO FORTIFIED STANDARD DETAILS F-RC-1 AND F-RC-2 FOR ADDITIONAL ASPHALT SHINGLE INSTALLATION OPTIONS. FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.
- 4.

UNDERLAYMENT INSTALLED PER FORTIFIED _____
HOME STANDARD REQUIREMENTS

D RIP EDGE AND ASTM D41 ASPHALT PRIMER _____
INSTALLED PER FORTIFIED STANDARD
DETAIL F-DE-1.

SHINGLES SET DIRECTLY IN A MINIMUM 8 IN. WIDE _____
STRIP OF COMPATIBLE FLASHING CEMENT (MAX.
THICKNESS OF FLASHING CEMENT = 1/8"). VERIFY
WITH MANUFACTURER THAT FLASHING
CEMENT/ROOF MASTIC IS COMPATIBLE WITH
UNDERLAYMENT.

TO MEET 2025 HAIL SUPPLEMENT REQUIREMENTS,
ASPHALT SHINGLES MUST HAVE AN OVERALL IBHS
ROOF SHINGLE HAIL IMPACT RATING OF "GOOD" OR
"EXCELLENT" OR BE POLYMER-MODIFIED WITH EITHER
A UL 2218 CLASS 4 OR FM 4473 CLASS 4 RATING.

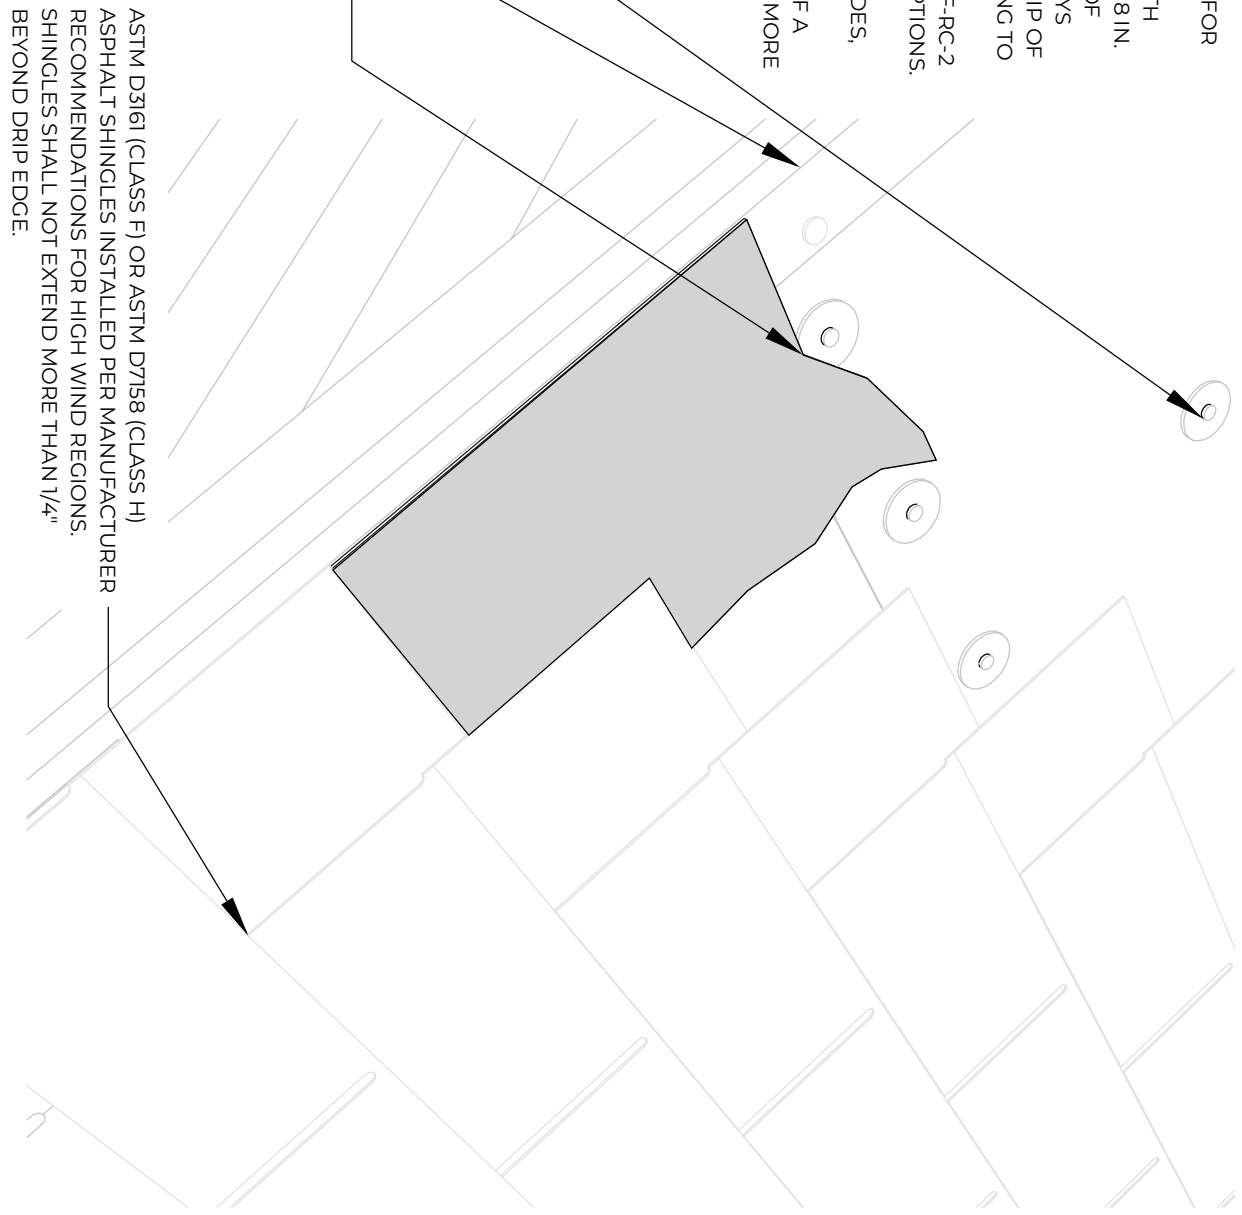

ASTM D3161 (CLASS F) OR ASTM D7158 (CLASS H)
ASPHALT SHINGLES INSTALLED PER MANUFACTURER
RECOMMENDATIONS FOR HIGH WIND REGIONS.
SHINGLES SHALL NOT EXTEND MORE THAN 1/4"
BEYOND DRIP EDGE.

APPLICABLE STANDARDS:



FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

ASPHALT SHINGLE INSTALLATION
GUIDANCE FOR STEEP SLOPE - OPTION 3:
SHINGLES SET DIRECTLY IN FLASHING
CEMENT AT RAKE ONLY

DRAWING #:

F-RC-3

DATE: 11/01/2024

GENERAL NOTES:

1. REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION. WHEN REPLACING AN ENTIRE DAMAGED SHEET WITH A DIMENSION OF LESS THAN 24" IN ANY DIRECTION, PROVIDE 2X4 BLOCKING ALONG ALL UNSUPPORTED EDGES, AND FASTEN SHEATHING IN ACCORDANCE WITH F-RR-3.
2. FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.
- 3.


AT PANEL ENDS, PROVIDE 2 X 4 SCAB FASTENED TO EXISTING MEMBER W/ 16D NAILS @ 4" O.C. STAGGERED, TYP. OF (2).

EXISTING ROOF SHEATHING BY OTHERS W/ 7/16" MIN. THICKNESS AND NO DAMAGE OR DETERIORATION. REFER TO FORTIFIED STANDARD DETAIL F-RR-3 FOR RE-NAILING SCHEDULE.

REFER TO FORTIFIED STANDARD DETAIL F-RR-3 FOR REQUIRED NAILING. ATTACH NEW ROOF DECK TO SCAB (NOT EXISTING ROOF MEMBER), TYP.

PREVIOUSLY DAMAGED ROOF DECK AREA. INSPECT ROOF SUPPORT MEMBERS BELOW FOR DETERIORATION OR DAMAGE AND REPLACE ENTIRE SHEET.

NEW ROOF DECK REPLACEMENT FASTENED TO SCAB, BLOCKINGS (IF APPLICABLE) AND EXISTING FRAMING IN ACCORDANCE WITH FORTIFIED STANDARD DETAIL F-RR-3.

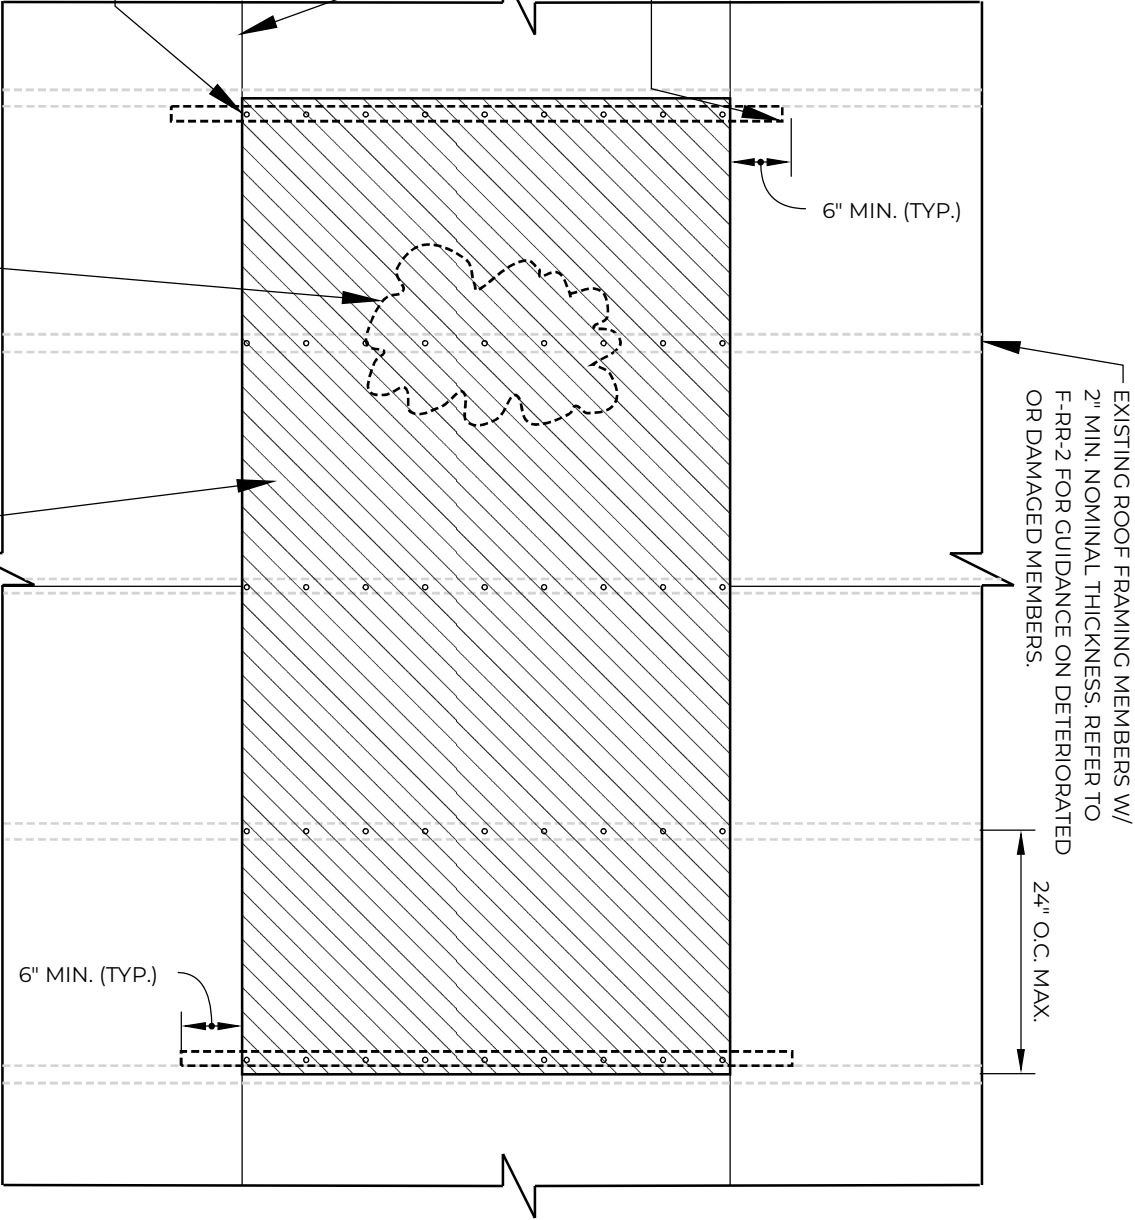

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

RE-ROOFING DECK REPLACEMENT
FASTENING DETAIL



DRAWING #:

F-RR-1

DATE: 11/01/2024



- GENERAL NOTES:
- REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION. SCAB WOOD MEMBERS MAY BE TRIMMED UP TO A MAXIMUM OF 1/2" AT THE BOTTOM TO FACILITATE INSTALLATION.
 - IF DAMAGE IS GREATER THAN THE CONDITIONS SHOWN, CONSULT A LICENSED PROFESSIONAL ENGINEER TO PROVIDE ENGINEERING DETAILS TO REPAIR THE DAMAGE. DAMAGED/DETERIORATED AREA MUST BE A MINIMUM OF 6 IN. AWAY FROM ANY MECHANICAL CONNECTIONS (I.E. TRUSS/RAFTER HANGERS, TRUSS CONNECTOR PLATES, ETC.)
 - WHEN THE FASCIA OR SUB-FASCIA IS THE ROOF FRAMING MEMBER THAT IS DAMAGED OR DETERIORATED, REMOVE AND REPLACE THE DAMAGED/DETERIORATED SECTION PLUS AT LEAST 2 FT. BEYOND THAT SECTION ON EACH SIDE.
 - FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.

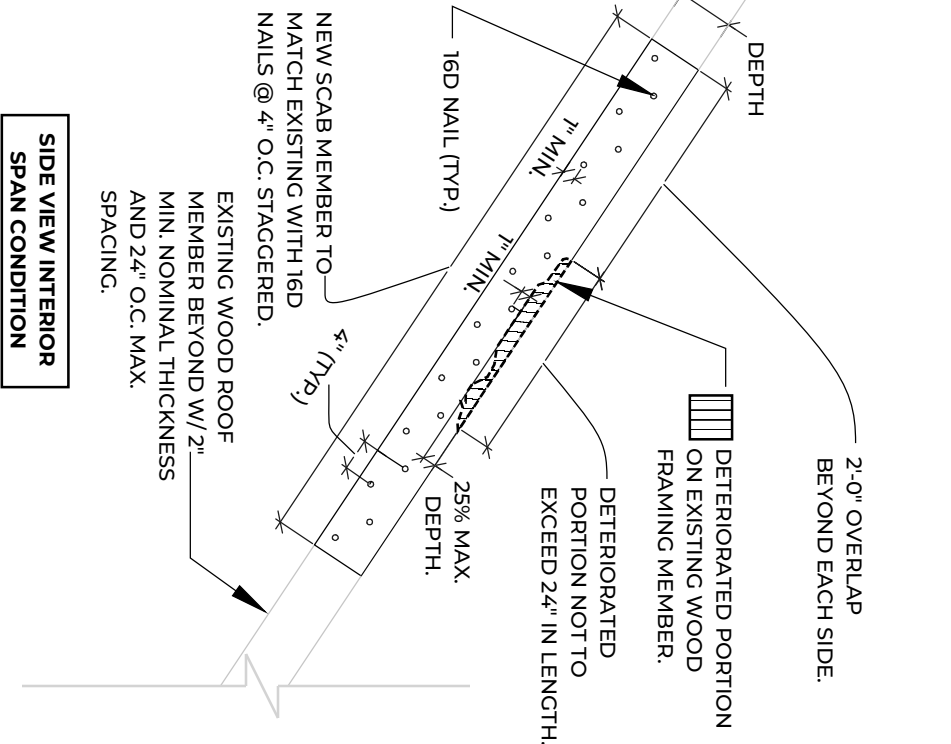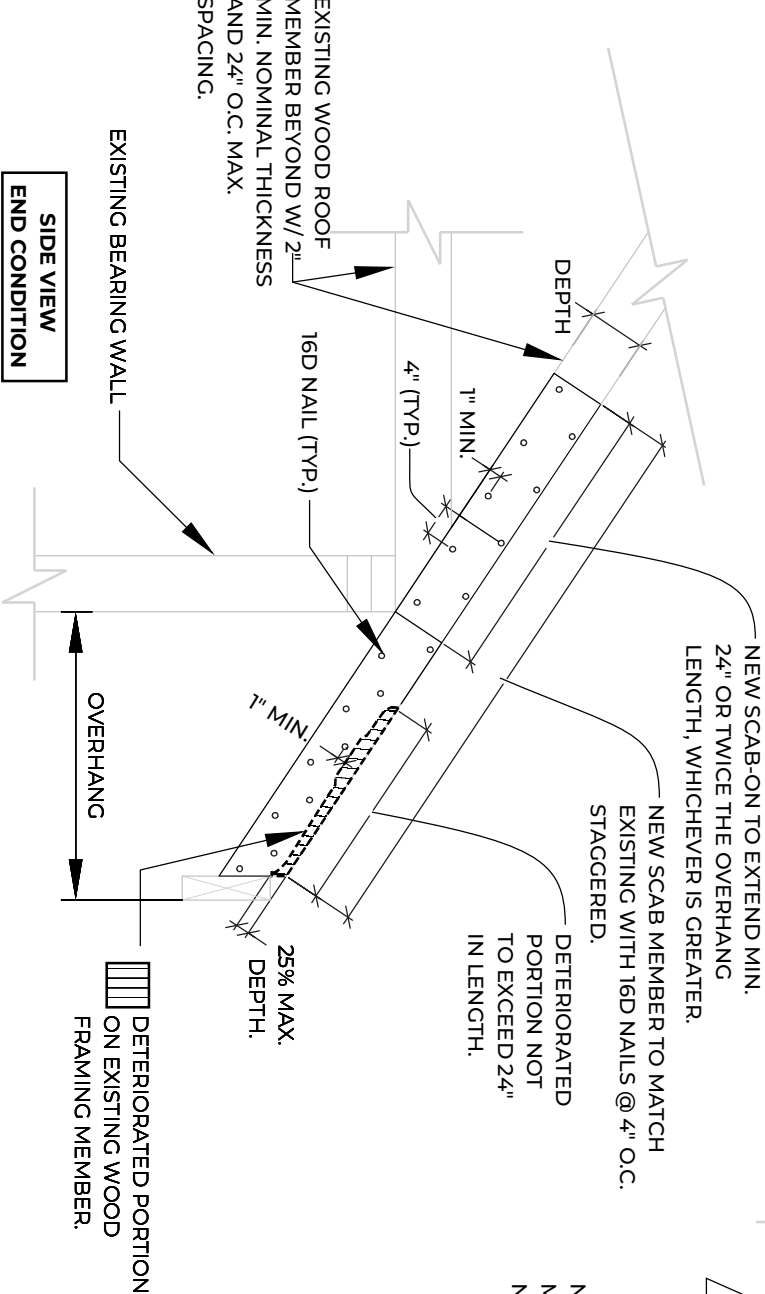

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

RE-ROOFING NEW SCAB MEMBER DETAIL
FOR DAMAGED OR DETERIORATED
WOOD FRAMING MEMBER

DRAWING #:

F-RR-2

DATE:

11/01/2024




GENERAL NOTES:

1. REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION.
2. FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT. FOR PREVIOUSLY FORTIFIED DESIGNATED HOMES WITH ULTIMATE SITE DESIGN WIND SPEED OF 160 MPH OR LESS IN EXPOSURE B OR C LOCATIONS, SUPPLEMENTAL FASTENING IS NOT REQUIRED.
- 3.

O EXISTING FASTENERS, IF IT CAN BE DOCUMENTED THAT EXISTING NAILING MEETS THE REQUIREMENTS OF F-RR-2, THEN SUPPLEMENTAL FASTENING (+) IS NOT REQUIRED.

+ RENAIL ROOF DECK WITH ADDITIONAL 0.113" X 2-3/8" 8D RING SHANK NAILS @ = 4" O.C. (SPACING BETWEEN NEW AND EXISTING NAILS SHALL NOT BE LESS THAN 2 INCHES.)

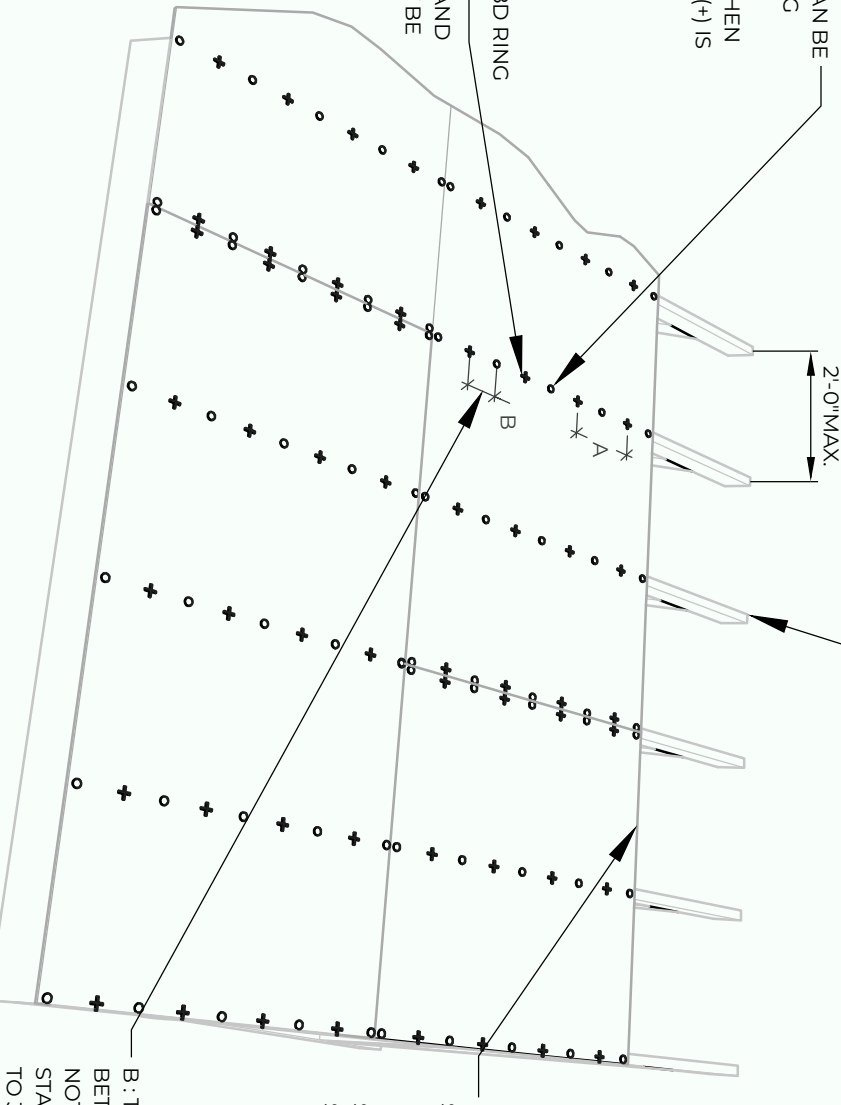

EXISTING ROOF FRAMING MEMBERS W/ 2" MIN. NOMINAL THICKNESS. REFER TO F-RR-2 FOR GUIDANCE ON DETERIORATED OR DAMAGED MEMBERS.

EXISTING STRUCTURAL WOOD PANEL ROOF SHEATHING (PLYWOOD OR OSB) W/ NO DAMAGE OR DETERIORATION. REFER TO F-RR-1 FOR DAMAGED OR DETERIORATED SHEATHING. REFER TO F-RS-2 FOR SHEATHING THICKNESS REQUIREMENTS.

B : TO AVOID WOOD SPLITTING, SPACING BETWEEN NEW AND EXISTING NAILS "B" SHALL NOT BE LESS THAN 2 IN. NAILS SHALL BE STAGGERED WHEN "B" IS LESS THAN OR EQUAL TO 3 IN.

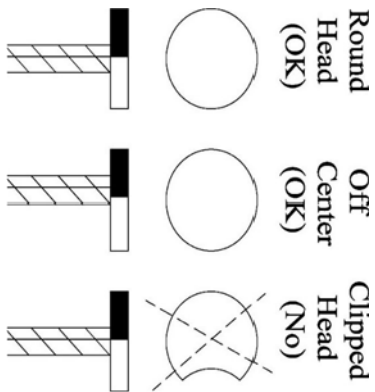


FIGURE 1.

KEY:

- O = EXISTING FASTENERS
- + = ADDITIONAL FASTENERS
- A = SPACING OF ADDITIONAL FASTENERS
- B = SPACING BETWEEN EXISTING AND ADDITIONAL FASTENER

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

HURRICANE AND HIGH WIND - RE-NAILING
THE ROOF DECK
(WOOD STRUCTURAL PANELS)

DRAWING #:

F-RR-3

DATE:

11/01/2024



GENERAL NOTES:

1. REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION.
2. APPLICABLE FOR ROOF PITCH 2:12 OR GREATER.
3. LOCAL BUILDING CODE REQUIREMENTS FOR ROOF SHEATHING THICKNESS AND/OR NAIL SIZE/ATTACHMENT SPACING MAY BE MORE STRINGENT BASED ON SITE CONDITIONS.
4. FOR CONCRETE AND CLAY TILE ROOF COVERS, MINIMUM REQUIRED SHEATHING THICKNESS IS 15/32".
5. FULL ROUND HEAD DIAMETER; NO CLIPPED-HEAD NAILS, COMMON NAILS OR STAPLES SHALL BE ALLOWED. REFER TO FIGURE 1.
6. FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.


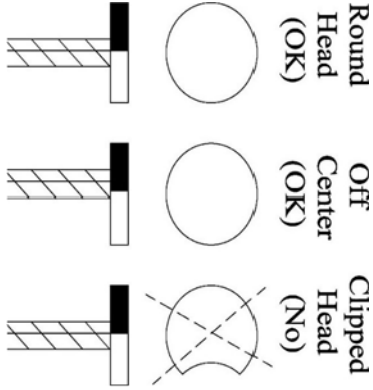


FIGURE 1.

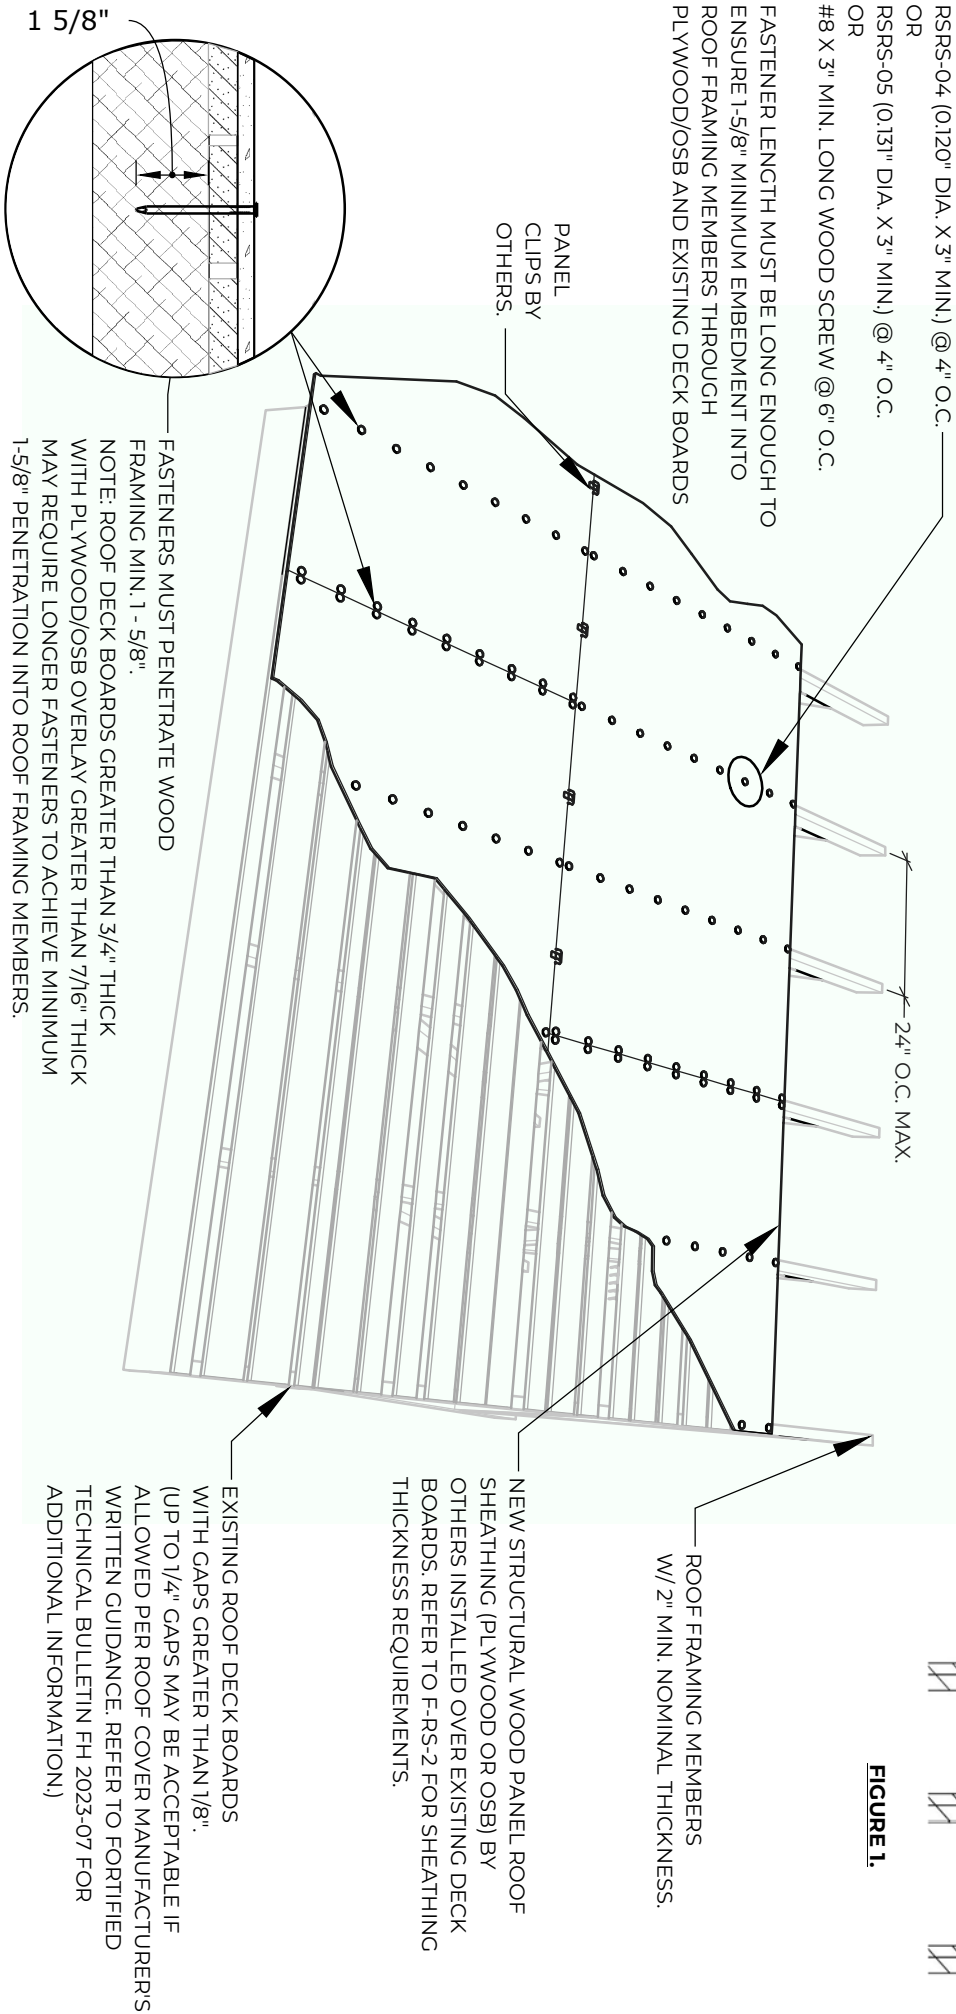

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

FASTENING WOOD STRUCTURAL
PANEL ROOF SHEATHING OVER
EXISTING 1X ROOF DECK BOARDS
WITH GAPS OVER 1/8"

DRAWING #:

F-RR-5

DATE:


11/01/2024



GENERAL NOTES:

- 1. REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION.
- 2. APPLICABLE FOR SHINGLE OR METAL ROOF COVERS.
- 3. FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.
- 4. FOR **RE-ROOFING**, EXISTING NAILING MUST BE DOCUMENTED TO MEET TABLE F-RS-1 OR BOARDS MUST BE RE-NAILED PER TABLE F-RS-1. FOR **NEW CONSTRUCTION**, NAILING MUST MEET TABLE F-RS-1. RING SHANK NAILS OR SMOOTH SHANK NAILS WITH EQUAL DIAMETER AND EMBEDMENT ARE ACCEPTABLE.

REFER TO TABLE F-RS-1 FOR REQUIRED
SIZE AND NUMBER OF NAILS.

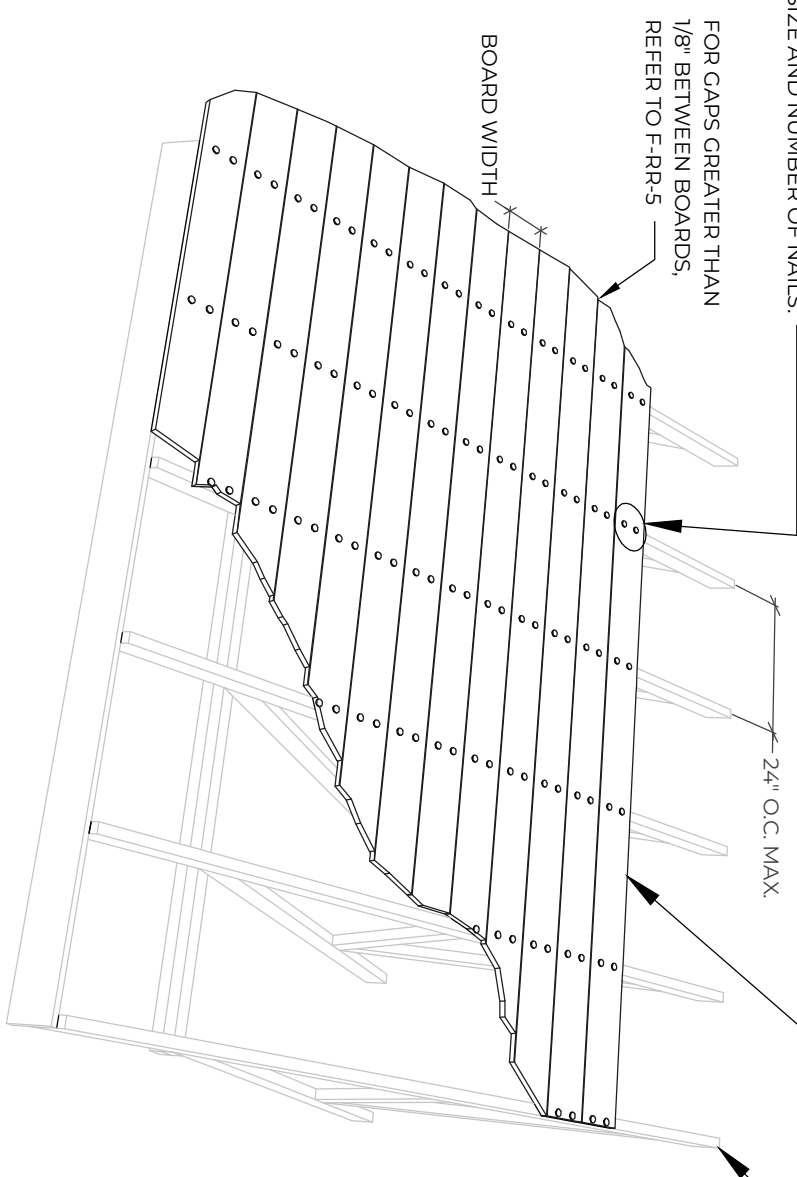

MINIMUM 5/8" SAWN LUMBER OR WOOD
BOARD ROOF DECK BY OTHERS.

ROOF FRAMING MEMBERS
W/ 2" MIN. NOMINAL
THICKNESS.

Table F-RS-1: FASTENERS REQUIRED FOR WOOD BOARD DECKING
ATTACHMENT.

WOOD BOARD/LUMBER (ROOF DECKING) WIDTH	NUMBER AND MINIMUM DIMENSIONS OF NAILS PER BOARD FOR EACH FRAMING MEMBER IT CROSSES
UP TO 8" .	TWO(2) 0.131" Ø MIN. W/ 1 - 5/8" PENETRATION INTO ROOF FRAMING MEMBERS (MIN. LENGTH OF NAIL= 2 - 1/2")
LARGER THAN 8" .	THREE(3) 0.131" Ø MIN. W/ 1 - 5/8" PENETRATION INTO ROOF FRAMING MEMBERS (MIN. LENGTH OF NAIL= 2 - 1/2")

NOTE: CLIPPED-HEAD, D-HEAD, OR ROUND-HEAD NAILS SHALL BE
ACCEPTABLE PROVIDED THEY HAVE THE REQUIRED MINIMUM
DIAMETER AND LENGTH .

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

ROOF DECK ATTACHMENT - SAWN LUMBER
OR WOOD BOARD ROOF DECK WITH NO
CAPS

DRAWING #:

F-RS-1

DATE:

11/01/2024



GENERAL NOTES:

1. REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION.
2. FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.

Table F-RS-2: MINIMUM REQUIREMENTS FOR ROOF SHEATHING THICKNESS AND FASTENING

ASCE Edition	Minimum Roof Sheathing Thickness ^{1,2,3}	Minimum Nail Size/Type ^{1,4,5}	Maximum Nail Spacing (All Roof Areas) ¹
ASCE 7-22 and prior	7/16"	RSRS-01; 0.113" dia. x 2-3/8" Roof Sheathing Ring Shank Nail	4" O.C. (13 nails per 4-ft section)

Notes:

1. Local building code requirements for roof sheathing thickness and/or nail size/attachment spacing may be more stringent based on site conditions.
2. For concrete and clay tile roof covers, minimum required sheathing thickness is 15/32".
3. For metal roof covers, verify manufacturer's sheathing thickness requirements are met.
4. Full round head ϕ ; No clipped-head nails, common nails or staples shall be allowed. Refer to Figure 1 in F-RS-2.
5. Longer nails may be needed for thicker sheathing. Nail must be long enough to penetrate a minimum of 1-5/8" into truss/rafter.

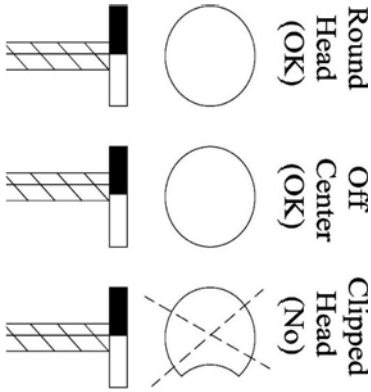
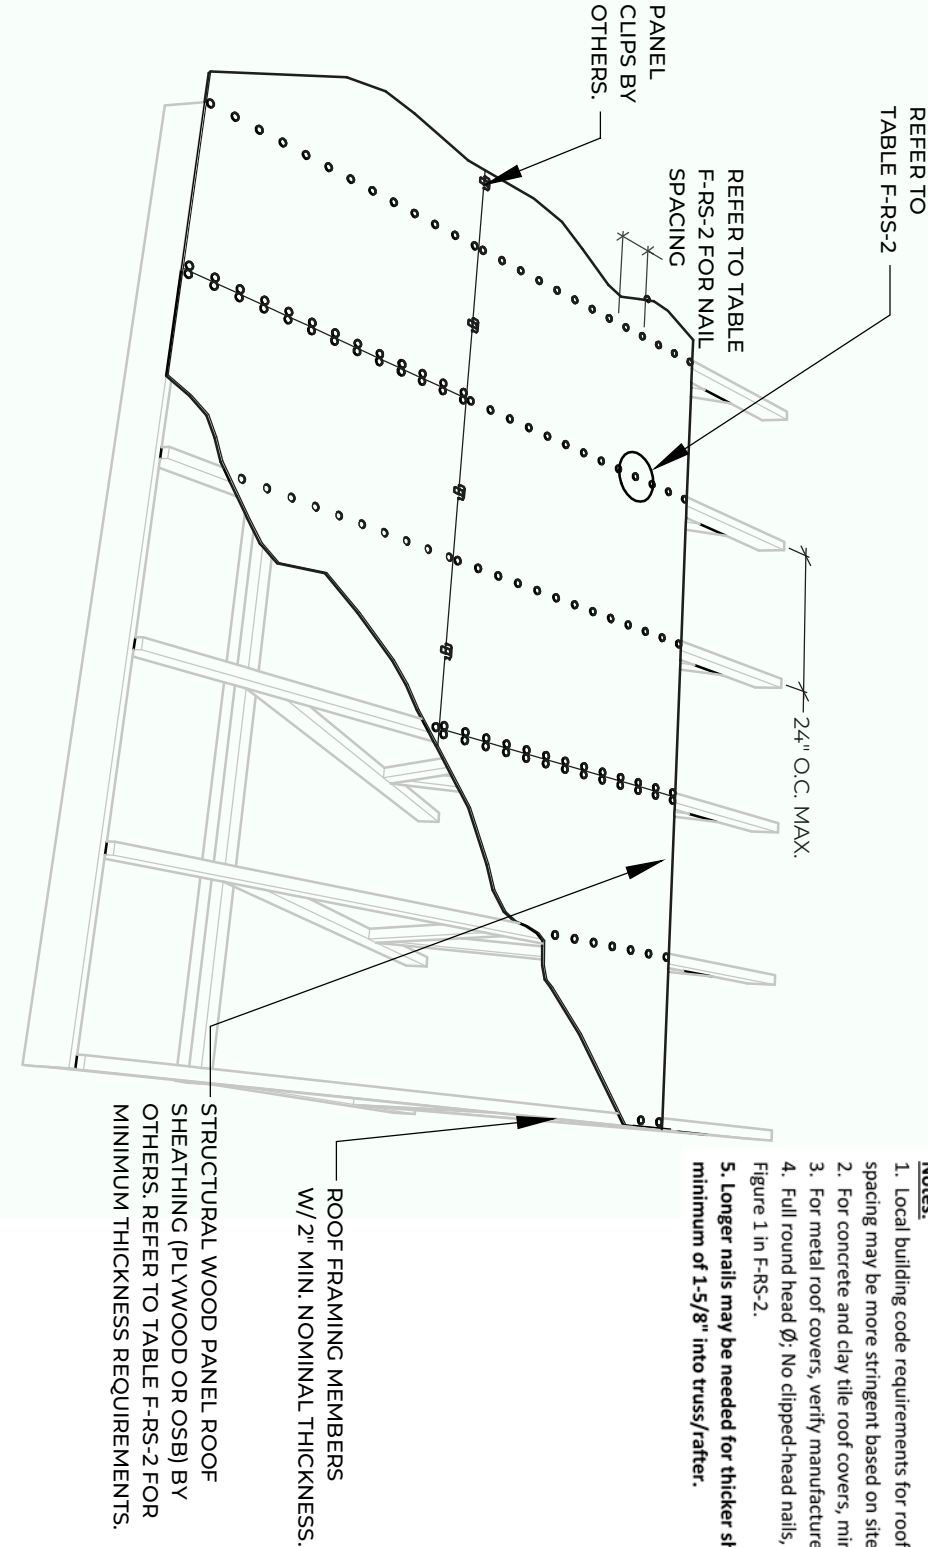


FIGURE 1.

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

HURRICANE AND HIGH WIND - NEW
CONSTRUCTION ROOF DECK
ATTACHMENT - STRUCTURAL WOOD
PANELS

DRAWING #:

F-RS-2

DATE:

11/01/2024



1.

MINIMUM REQUIREMENTS FOR SPRAY ADHESIVES:
PRODUCT MUST BE TESTED AND EVALUATED IN ACCORDANCE WITH EITHER ASTM E330, STANDARD TEST METHOD FOR STRUCTURAL PERFORMANCE OF EXTERIOR WINDOWS, DOORS, SKYLIGHTS, AND CURTAIN WALLS BY UNIFORM STATIC AIR PRESSURE DIFFERENCE (APPLIED TO ROOF SHEATHING) OR TAS 202-94, CRITERIA FOR TESTING IMPACT AND NON-IMPACT RESISTANT BUILDING ENVELOPE COMPONENTS USING UNIFORM STATIC AIR PRESSURE. THE MINIMUM ALLOWABLE DESIGN UPLIFT PRESSURE MUST BE GREATER THAN OR EQUAL TO 110 PSF AND THE PROOF TEST PRESSURE ACHIEVED WITHOUT FAILURE OR STRUCTURAL DISTRESS MUST BE GREATER THAN OR EQUAL TO 165 PSF.

2.

ADHESIVE MUST BE A TWO-COMPONENT SPRAY POLYURETHANE FOAM SYSTEM WITH A MINIMUM CORE DENSITY OF 1.5-3.0 PCF IN ACCORDANCE WITH ASTM D1622, STANDARD TEST METHOD FOR APPARENT DENSITY OF RIGID CELLULAR PLASTICS.

3.

SPRAY POLYURETHANE FOAM ADHESIVE SYSTEM MUST BE INSTALLED BY A PROPERLY TRAINED AND QUALIFIED APPLICATOR IN ACCORDANCE WITH THE MANUFACTURER'S MAINTENANCE AND INSTALLATION GUIDELINES.



4.

DOCUMENTATION FROM THE INSTALLING CONTRACTOR, ON COMPANY LETTERHEAD, IDENTIFYING THE MANUFACTURER AND PRODUCT USED FOR THE IMPROVED ROOF SHEATHING ATTACHMENT/SEALED ROOF DECK MUST BE PROVIDED TO THE CERTIFIED FORTIFIED EVALUATOR TO BE INCLUDED WITH FINAL DESIGNATION CHECKLIST. DOCUMENTATION SHOULD ALSO STATE THAT THE INSTALLATION MEETS THE MANUFACTURER'S REQUIREMENTS FOR AN ALLOWABLE DESIGN UPLIFT PRESSURE OF AT LEAST 110 PSF (PROOF TEST OF AT LEAST 165 PSF).

5.

USE THE MINIMUM DENSITY AND INSTALLATION REQUIREMENTS PRESCRIBED BY THE MANUFACTURER TO MEET A MINIMUM DESIGN UPLIFT PRESSURE ON THE SHEATHING OF 110 PSF.

GENERAL NOTES:
REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION EXISTING SHEATHING REQUIREMENTS: 7/16" MIN. THICKNESS REQUIRED WITH ROOF MEMBERS @ 24" O.C. MAX. FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.

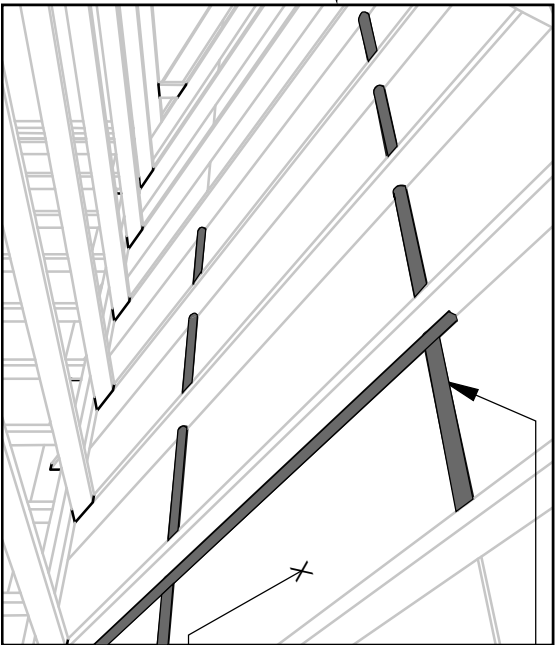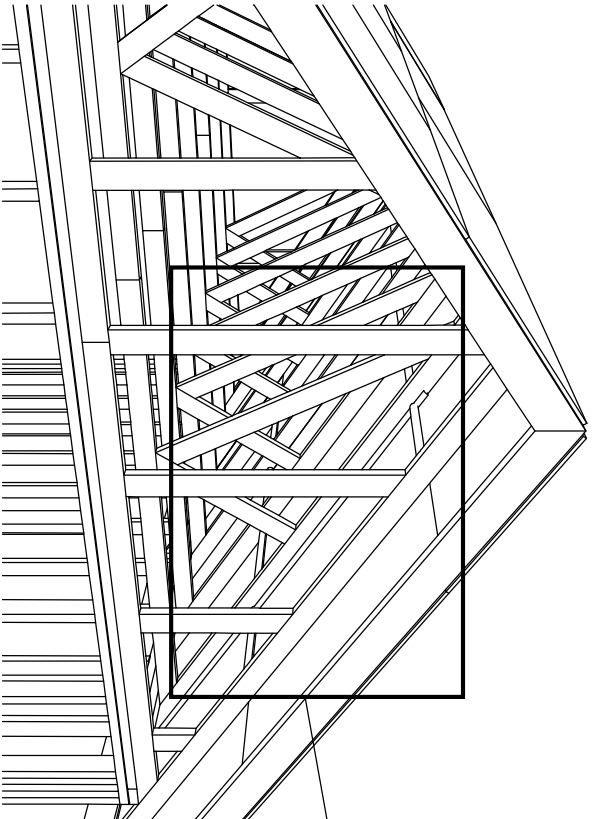

1.5" TO 3" FILLET OF 2-PART SPRAY-APPLIED CLOSED CELL POLYURETHANE FOAM ADHESIVE AT ALL JOINTS BETWEEN SHEATHING AND AT ALL INTERSECTIONS BETWEEN ROOF SHEATHING AND ROOF FRAMING MEMBERS, AND AT ALL VALLEYS. REFER TO MINIMUM REQUIREMENTS FOR SPRAY ADHESIVES.
EXISTING STRUCTURAL WOOD PANEL ROOF SHEATHING BY OTHERS. REFER TO GENERAL NOTE #2 FOR REQUIREMENTS.

UNDERSIDE OF ROOF DECK FROM WITHIN ATTIC

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

STEEP SLOPE ROOF DECK ATTACHMENT AND SEALED ROOF DECK FROM WITHIN USING SPRAY FOAM

DRAWING #:

F-SRD-1

DATE: 11/01/2024



GENERAL NOTES:

1. REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION.
2. REFER TO FORTIFIED STANDARD DETAIL F-C-1 FOR CORROSION PROTECTION REQUIREMENTS.
3. APPLICABLE FOR ROOF PITCH 2:12 OR GREATER.
4. NAILS USED TO ATTACH UNDERLAYMENT SHALL BE ANNULAR RING OR DEFORMED SHANK ROOFING NAILS W/ 0.083" MINIMUM DIAMETER AND SUFFICIENT LENGTH TO PENETRATE THROUGH THE ROOF SHEATHING OR NOT LESS THAN 3/4" INTO THE ROOF SHEATHING W/ 1" DIAMETER BUTTON CAPS (METAL BUTTON CAPS ARE REQUIRED FOR ULTIMATE DESIGN WIND SPEED OF 160 MPH OR GREATER).
5. FOR WOOD SHAKE AND SHINGLE ROOF COVERS, SYNTHETIC/SELF-ADHERED UNDERLAYMENT IS NOT PERMITTED. REFER TO TECHNICAL BULLETIN FH 2021-03 FOR MORE INFORMATION.
6. FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS, IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.

FLASHING TAPE AT ALL PANEL SEAMS FULLY ADHERED W/ NO WRINKLES OR VOIDS USING ROLLER.

MATERIAL OPTION 1: 4" WIDE ASTM D1970 COMPLIANT SELF-ADHERING POLYMER - MODIFIED BITUMEN FLASHING TAPE.

MATERIAL OPTION 2: 3 - 3/4" WIDE AAMA 711 LEVEL 3 (FOR EXPOSURE UP TO 80°C/176°F) COMPLIANT SELF-ADHERING FLASHING TAPE.

ASTM D226 TYPE II #30 OR ASTM D4869 TYPE III OR TYPE IV #30 UNDERLAYMENT. (FOR ASPHALT SHINGLE ROOF COVERS, ASTM D6757 UNDERLAYMENT IS ALSO ACCEPTABLE)

ALT: REINFORCED SYNTHETIC ROOF UNDERLAYMENT WITH ICC APPROVAL AS ASTM D226 TYPE II;

MINIMUM TEAR STRENGTH = 15 LBF PER ASTM D4533

MINIMUM TENSILE STRENGTH = 20 PSF PER ASTM D5035

PASS ASTM D4869 SHOWER TEST.

HORIZONTAL LAPS = 4" MIN.

END LAPS = 6" MIN.

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)

FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:


STEEP SLOPE SEALED ROOF DECK - FLASHING TAPE AND UNDERLAYMENT - SHINGLE OR METAL ROOF COVERS

DRAWING #:

F-SRD-2


DATE:

11/01/2024

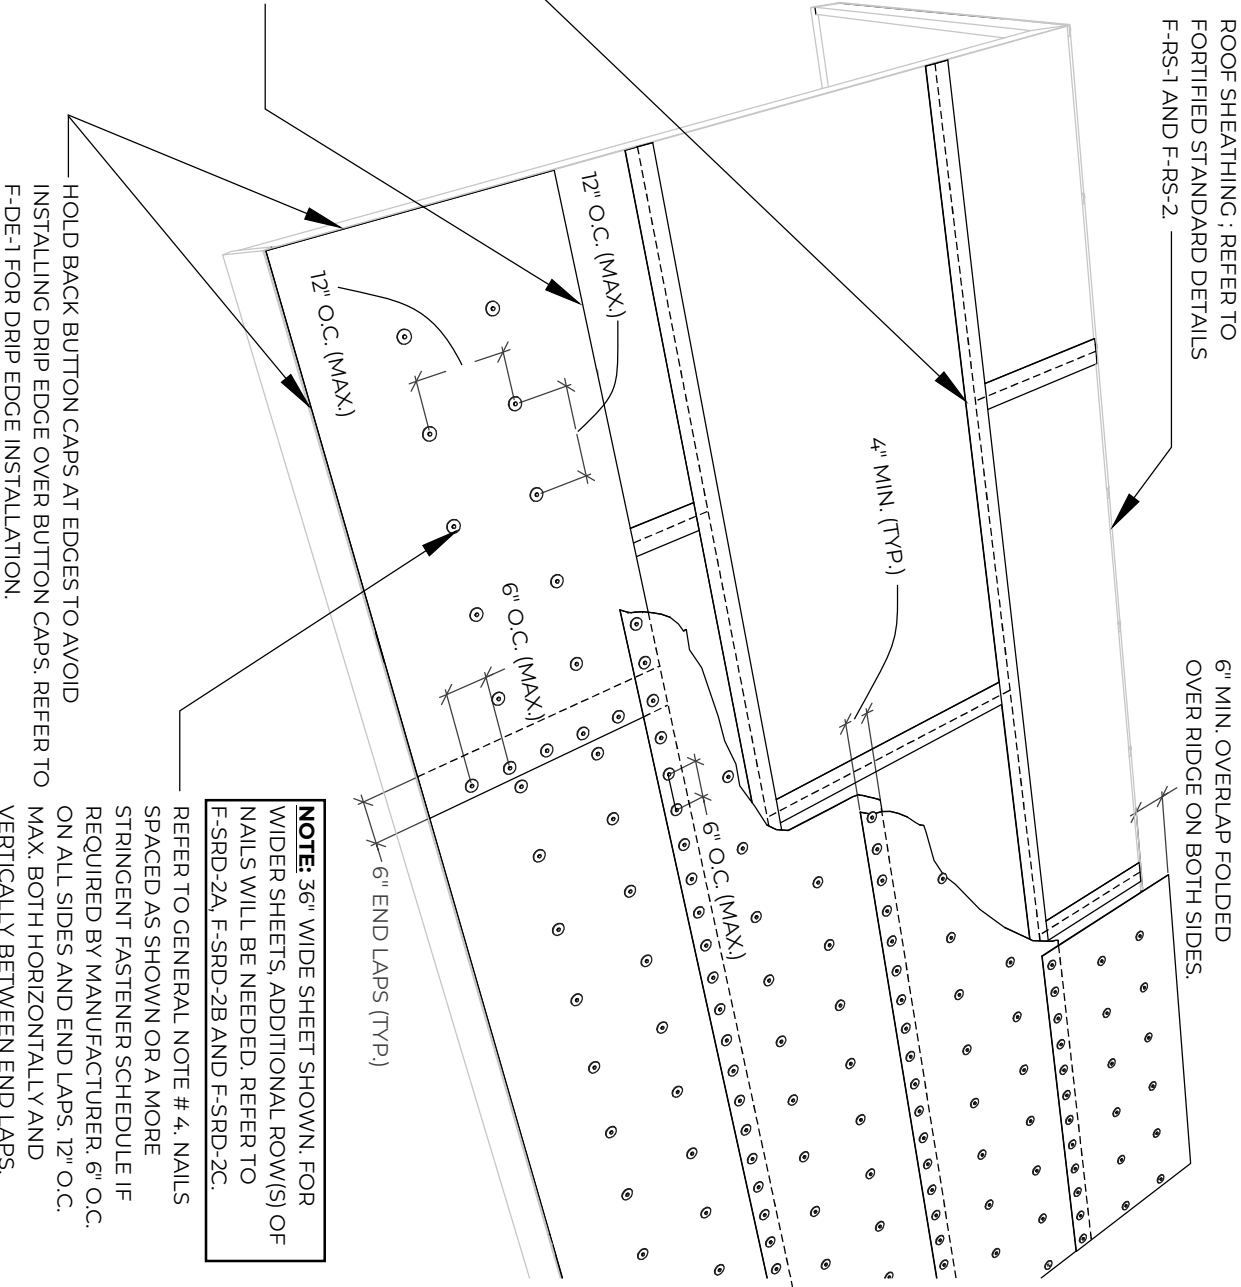

GENERAL NOTES:

1. THIS ILLUSTRATION IS PROVIDED AS A SUPPLEMENT TO STANDARD DETAIL DRAWING F-SRD-2. REFER TO F-SRD-2 FOR GENERAL NOTES, ADDITIONAL INFORMATION AND REQUIREMENTS NOT SHOWN HERE.

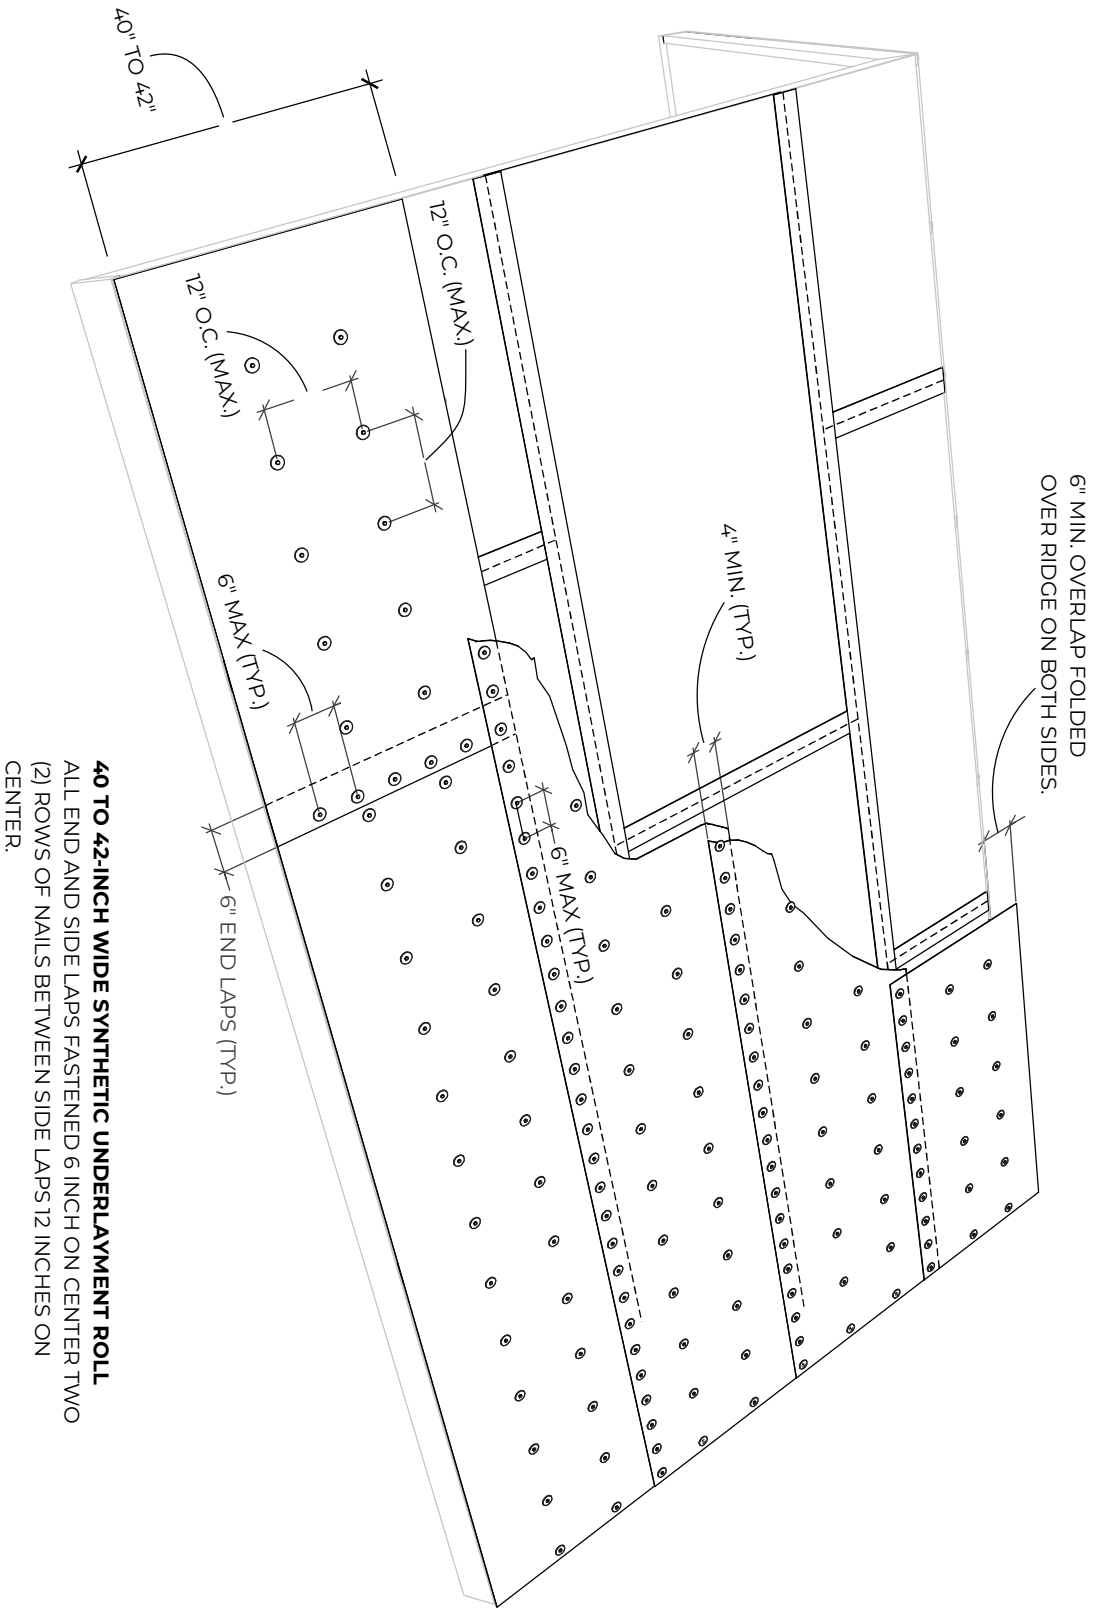

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

STEEP SLOPE SEALED ROOF DECK -
FLASHING TAPE AND UNDERLAYMENT -
SHINGLE OR METAL ROOF COVERS
USING 40 TO 42-INCHWIDE SYNTHETIC
UNDERLAYMENT.

DRAWING #:

F-SRD-2A


DATE:

11/01/2024



GENERAL NOTES:

1. THIS ILLUSTRATION IS PROVIDED AS A SUPPLEMENT TO STANDARD DETAIL DRAWING F-SRD-2. REFER TO F-SRD-2 FOR GENERAL NOTES, ADDITIONAL INFORMATION AND REQUIREMENTS NOT SHOWN HERE.

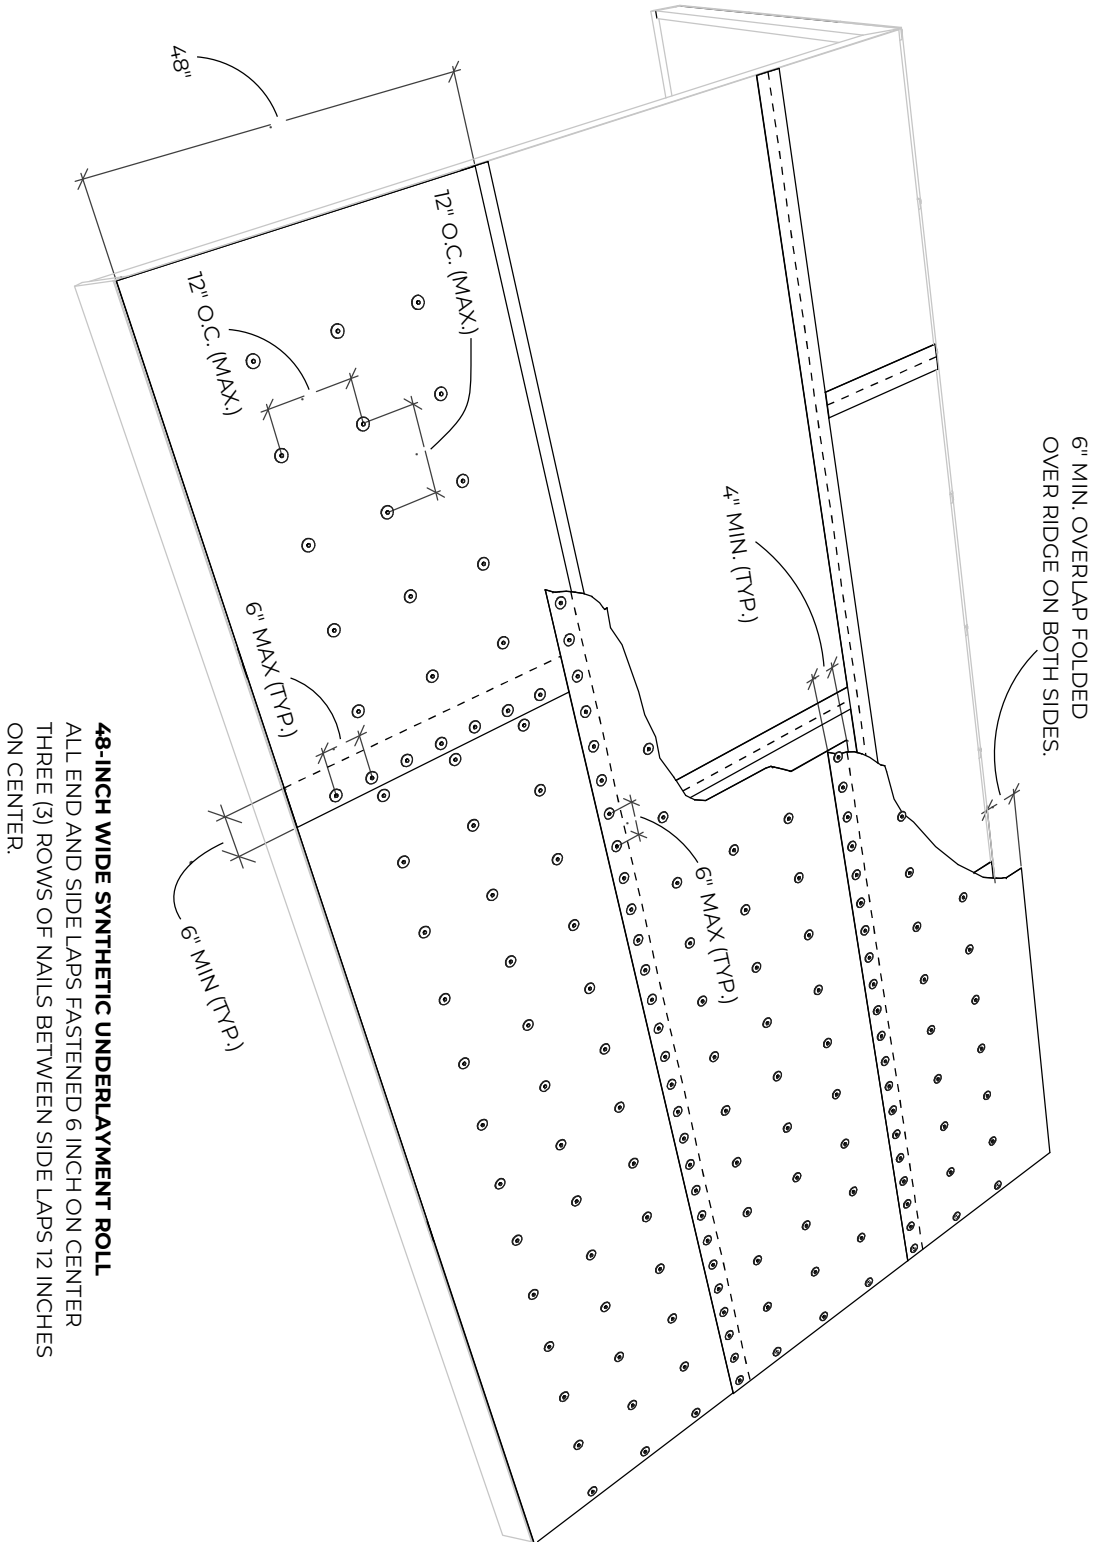

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

STEEP SLOPE SEALED ROOF DECK -
FLASHING TAPE AND UNDERLAYMENT -
SHINGLE OR METAL ROOF COVERS
USING 48-INCH WIDE SYNTHETIC
UNDERLAYMENT.

DRAWING #:

F-SRD-2B


DATE:

11/01/2024



GENERAL NOTES:

1. THIS ILLUSTRATION IS PROVIDED AS A SUPPLEMENT TO STANDARD DETAIL DRAWING F-SRD-2. REFER TO F-SRD-2 FOR GENERAL NOTES, ADDITIONAL INFORMATION AND REQUIREMENTS NOT SHOWN HERE.

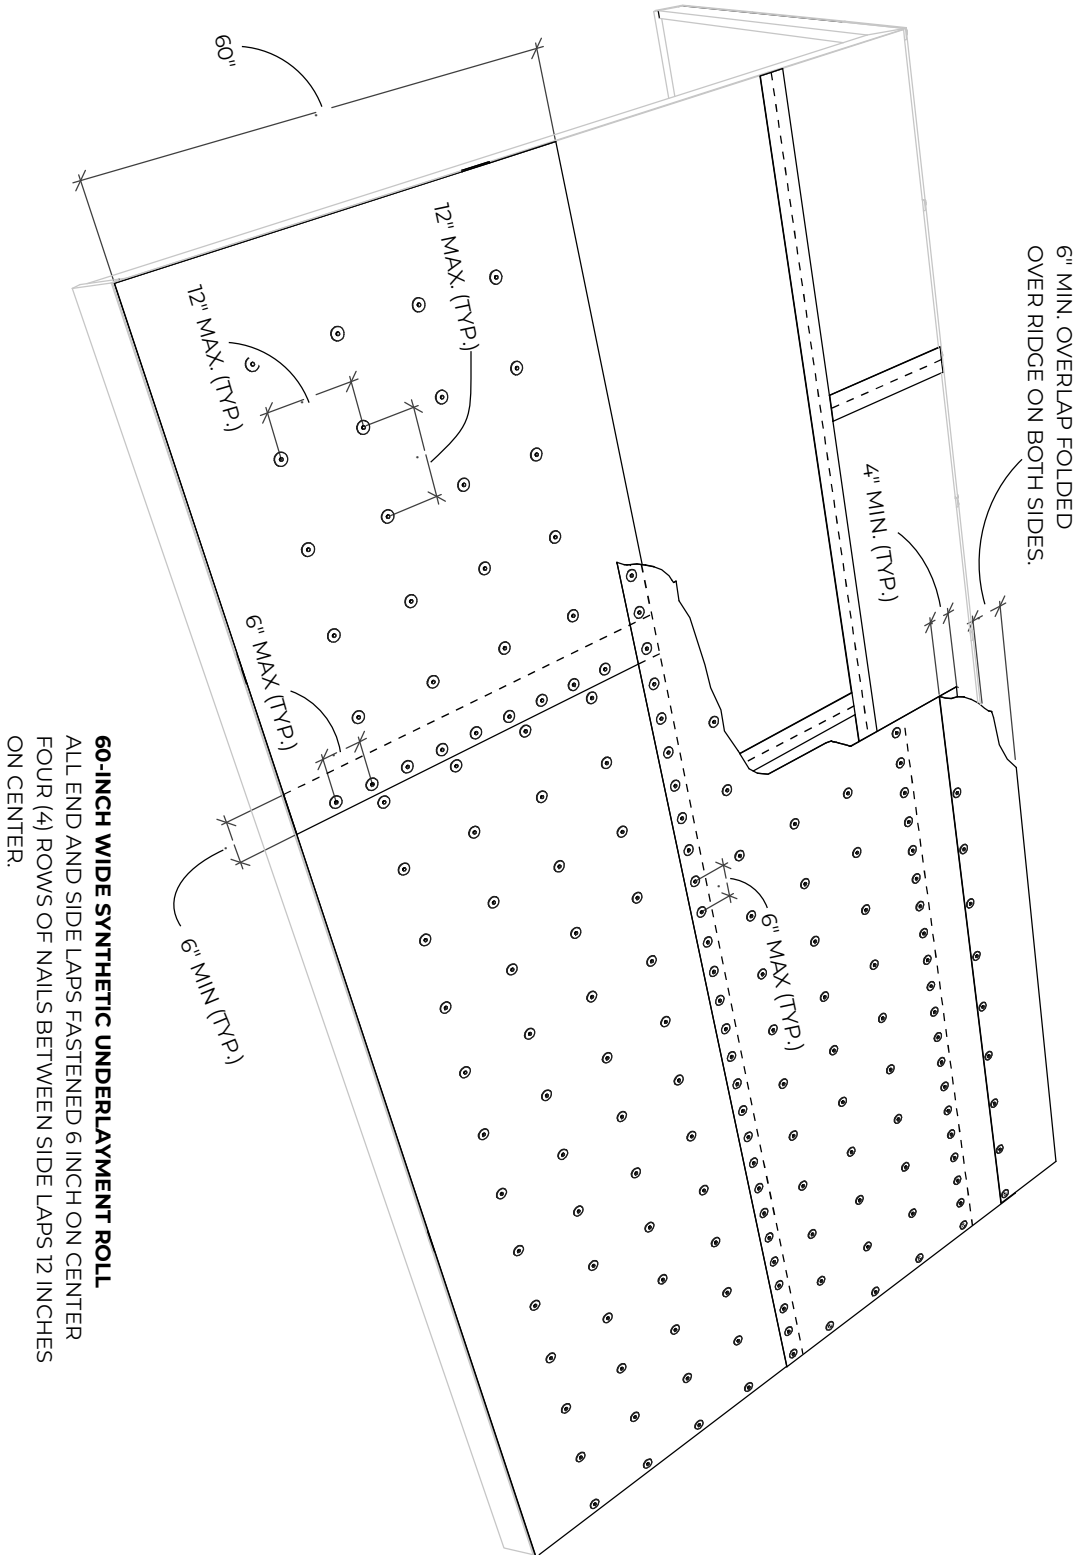

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

STEEP SLOPE SEALED ROOF DECK -
FLASHING TAPE AND UNDERLAYMENT -
SHINGLE OR METAL ROOF COVERS
USING 60-INCH WIDE SYNTHETIC
UNDERLAYMENT.

DRAWING #:

F-SRD-2C

DATE:

11/01/2024



GENERAL NOTES:


1. REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION.
2. REFER TO FORTIFIED STANDARD DETAIL F-C-1 FOR CORROSION PROTECTION REQUIREMENTS.
3. WEAVE UNDERLAYMENT ACROSS VALLEYS.
4. DOUBLE LAP UNDERLAYMENT ACROSS RIDGES (UNLESS THERE IS A CONTINUOUS RIDGE VENT).
5. LAP UNDERLAYMENT WITH MINIMUM 6" LEG. *TURNED UP" AT WALL INTERSECTIONS; LAP WALL WEATHER BARRIER OVER TURNED-UP ROOF UNDERLAYMENT.
6. APPLICABLE FOR ROOF PITCH 2:12 OR GREATER.
7. NAILS USED TO ATTACH UNDERLAYMENT SHALL BE ANNULAR RING OR DEFORMED SHANK ROOFING NAILS W/ 0.083" MINIMUM DIAMETER AND SUFFICIENT LENGTH TO PENETRATE THROUGH THE ROOF SHEATHING OR NOT LESS THAN 3/4" INTO THE ROOF SHEATHING W/ 1" DIAMETER BUTTON CAPS (METAL BUTTON CAPS ARE REQUIRED FOR ULTIMATE DESIGN WIND SPEED OF 170 MPH OR GREATER.)
8. FOR WOOD SHAKE AND SHINGLE ROOF COVERS, SYNTHETIC/SELF-ADHERED UNDERLAYMENT IS NOT PERMITTED. REFER TO TECHNICAL BULLETIN FH 2021-03 FOR MORE INFORMATION.
9. FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.

ROOF SHEATHING BY OTHERS; REFER TO FORTIFIED STANDARD DETAILS F-RS-1 AND F-RS-2.

ASTM D226 TYPE II #30 OR ASTM D4869

TYPE III OR TYPE IV #30 UNDERLAYMENT LAPPED AS SHOWN. (FOR ASPHALT SHINGLE ROOF COVERS, ASTM D6757 UNDERLAYMENT IS ALSO ACCEPTABLE)

FOR SYNTHETIC UNDERLAYMENT, REFER TO F-SRD-7 AND F-SRD-8.

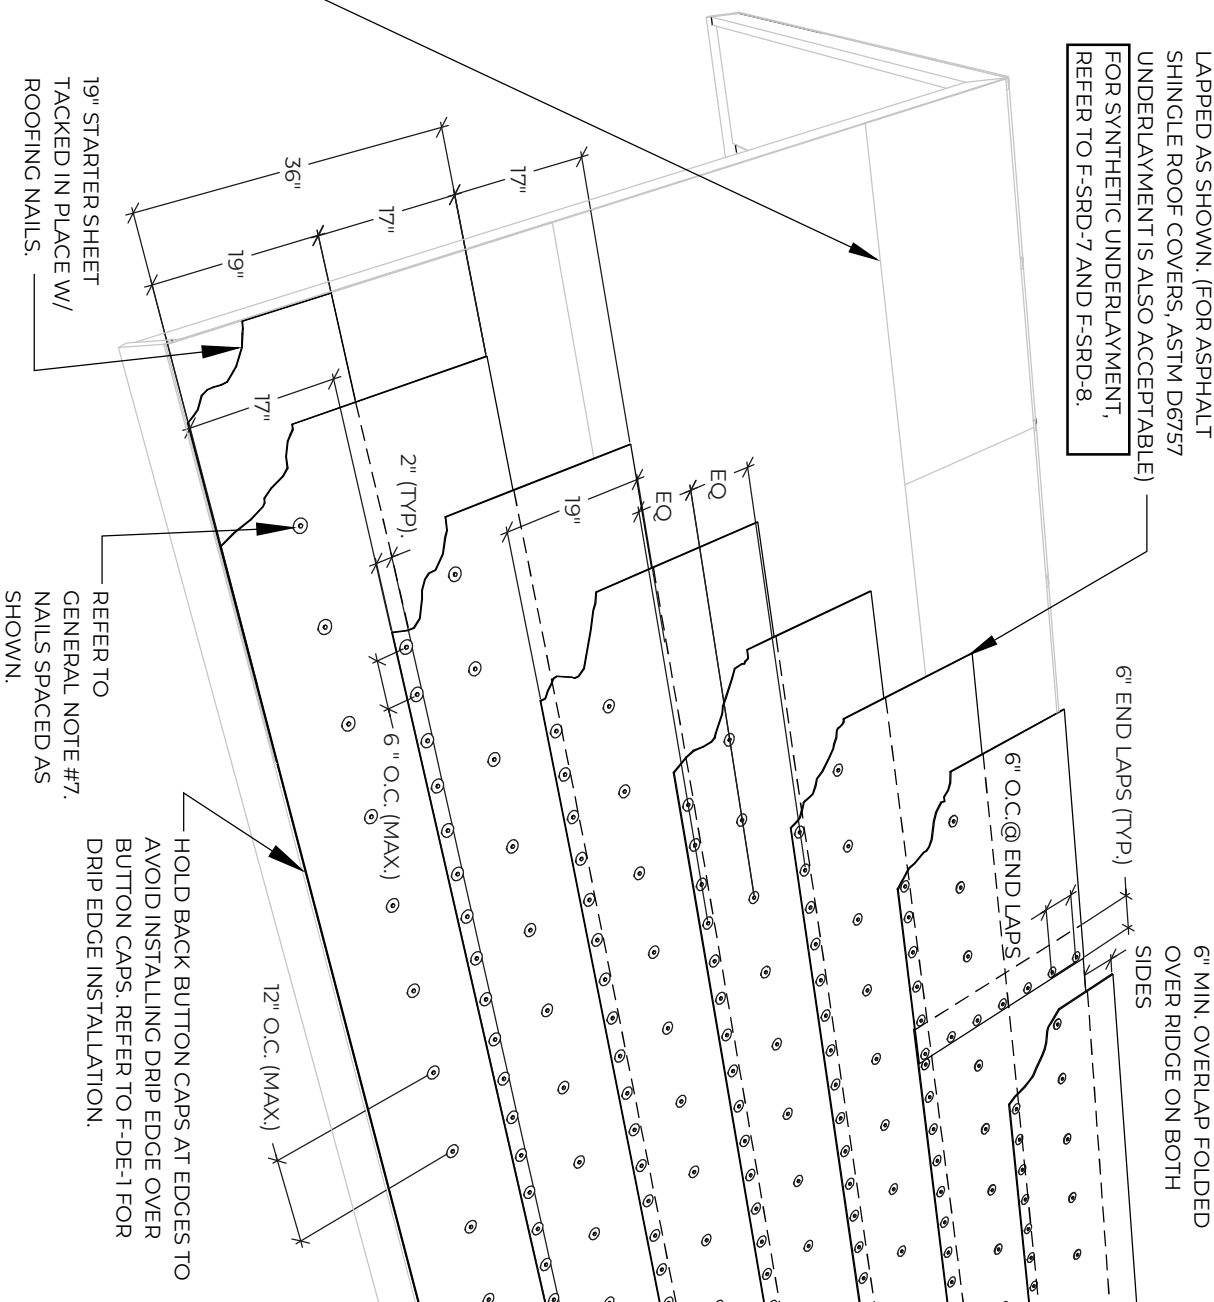

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

STEEP SLOPE SEALED ROOF DECK -
TWO LAYERS **FELT** UNDERLAYMENT -
SHINGLE OR METAL ROOF COVERS

DRAWING #:

F-SRD-3

DATE:

11/01/2024




GENERAL NOTES:

1. REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION.
2. APPLICABLE FOR ROOF PITCH 2:12 OR GREATER.
3. REFER TO AND INSTALL IN ACCORDANCE WITH MANUFACTURER SPECIFICATIONS AND INSTALLATION INSTRUCTIONS. REFER TO PRODUCT APPROVAL TO VERIFY REQUIRED WIND PRESSURES ARE MET IF APPLICABLE.
4. ADEQUATE ATTIC VENTILATION IS REQUIRED. REFER TO UNDERLAYMENT AND PRIMARY ROOF SYSTEM MANUFACTURERS INSTALLATION INSTRUCTIONS FOR VENTILATION LIMITATIONS. ALSO CHECK WITH LOCAL BUILDING CODES FOR RESTRICTIONS.
5. FOR WOOD SHAKE AND SHINGLE ROOF COVERS, SYNTHETIC/SELF-ADHERED UNDERLAYMENT IS NOT PERMITTED. REFER TO TECHNICAL BULLETIN FH 2021-03 FOR MORE INFORMATION.
6. FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.

ROOF SHEATHING: REFER TO FORTIFIED STANDARD DETAILS F-RS-1 AND F-RS-2. APPLY MANUFACTURER-SPECIFIED COMPATIBLE PRIMER TO ROOF SHEATHING PER MANUFACTURER INSTALLATION INSTRUCTIONS.

4" MIN. SIDELAPS OR GREATER IF SPECIFIED BY MANUFACTURERS SPECIFICATIONS AND INSTALLATION INSTRUCTIONS.

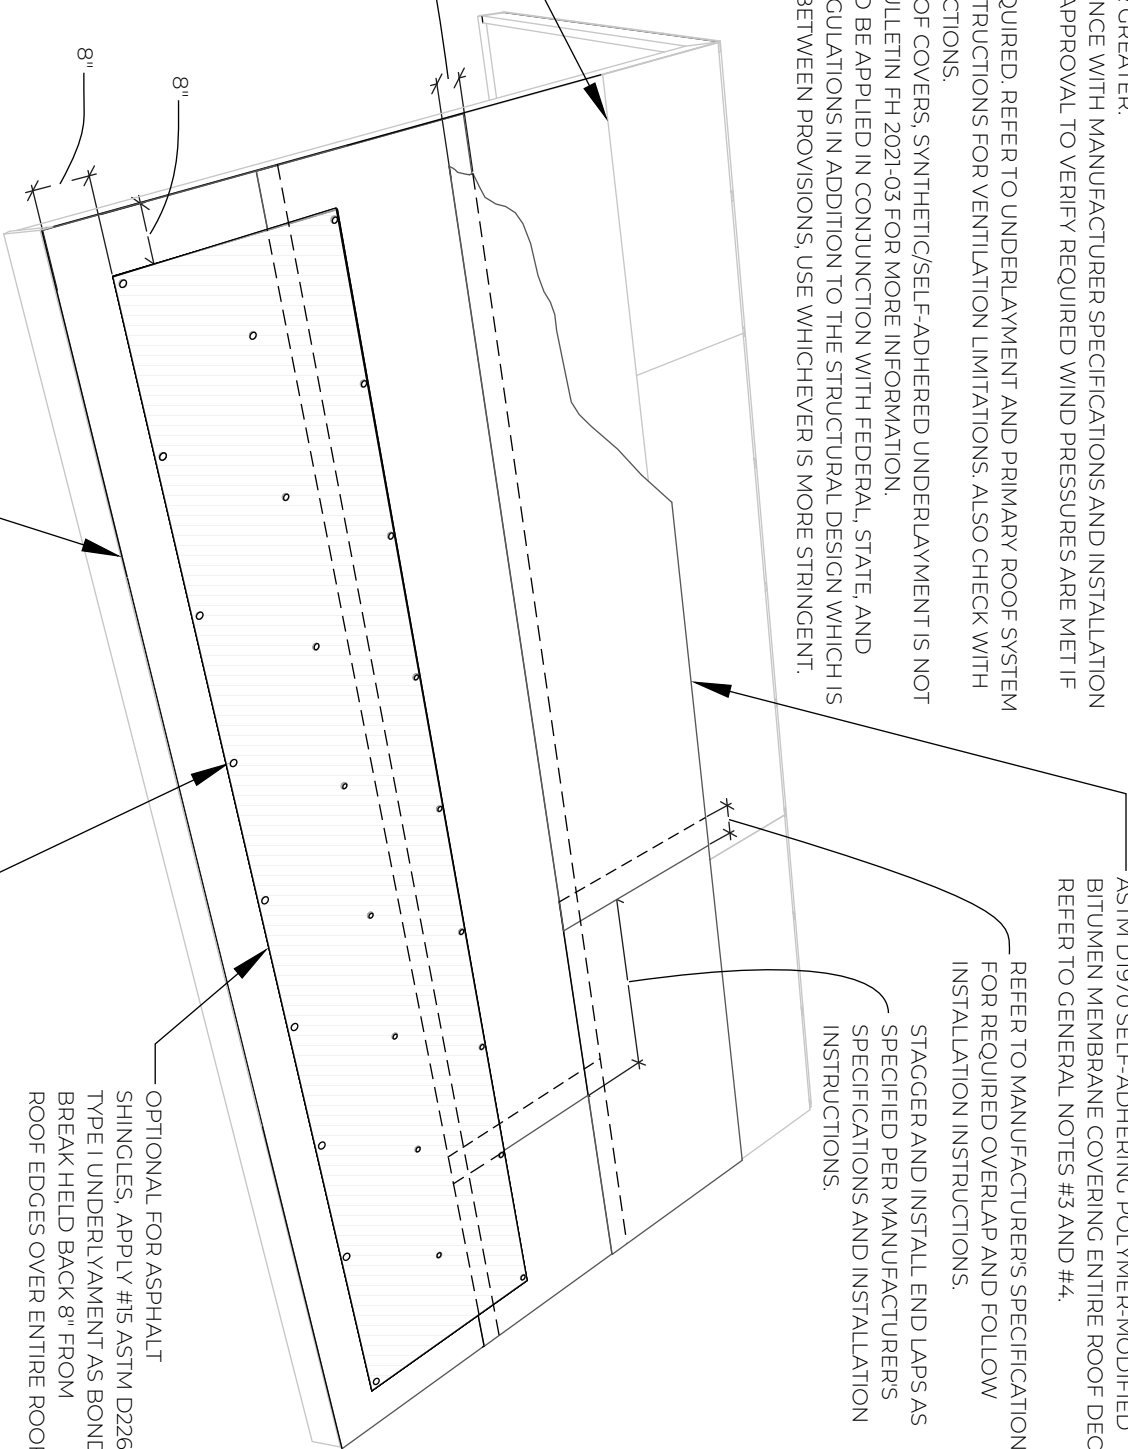

REFER TO F-DE-1 FOR DRIP EDGE INSTALLATION.

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

STEEP SLOPE SEALED ROOF DECK - SELF-ADHERED MEMBRANE (SHOWING BOND BREAK FOR ASPHALT SHINGLES) - SHINGLE AND METAL ROOF COVERS

DRAWING #:


F-SRD-4

DATE:

11/01/2024



- GENERAL NOTES:
1. REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION.
 2. REFER TO FORTIFIED STANDARD DETAIL F-C-1 FOR CORROSION PROTECTION REQUIREMENTS.
 3. APPLICABLE FOR ROOF PITCH 2:12 OR GREATER. REFER TO AND INSTALL IN ACCORDANCE WITH ROOF TILE MANUFACTURERS INFORMATION AND THE TESTED ASSEMBLY SHOWN IN THE PRODUCT APPROVAL. REFER TO PRODUCT APPROVAL TO VERIFY REQUIRED WIND PRESSURES ARE MET IF APPLICABLE.
 4. ADEQUATE ATTIC VENTILATION IS REQUIRED. REFER TO UNDERLAYMENT AND PRIMARY ROOF SYSTEM MANUFACTURERS INSTALLATION INSTRUCTIONS FOR VENTILATION LIMITATIONS.
 5. ALSO CHECK WITH LOCAL BUILDING CODES FOR RESTRICTIONS. NAILS USED TO ATTACH UNDERLAYMENT SHALL BE ANNULAR RING OR DEFORMED SHANK ROOFING NAILS W/ 0.083" MINIMUM DIAMETER AND SUFFICIENT LENGTH TO PENETRATE THROUGH THE ROOF SHEATHING OR NOT LESS THAN 3/4" INTO THE ROOF SHEATHING W/ 1" DIAMETER BUTTON CAPS (METAL BUTTON CAPS ARE REQUIRED FOR ULTIMATE DESIGN WIND SPEED OF 170 MPH OR GREATER).
 6. FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.
 - 7.

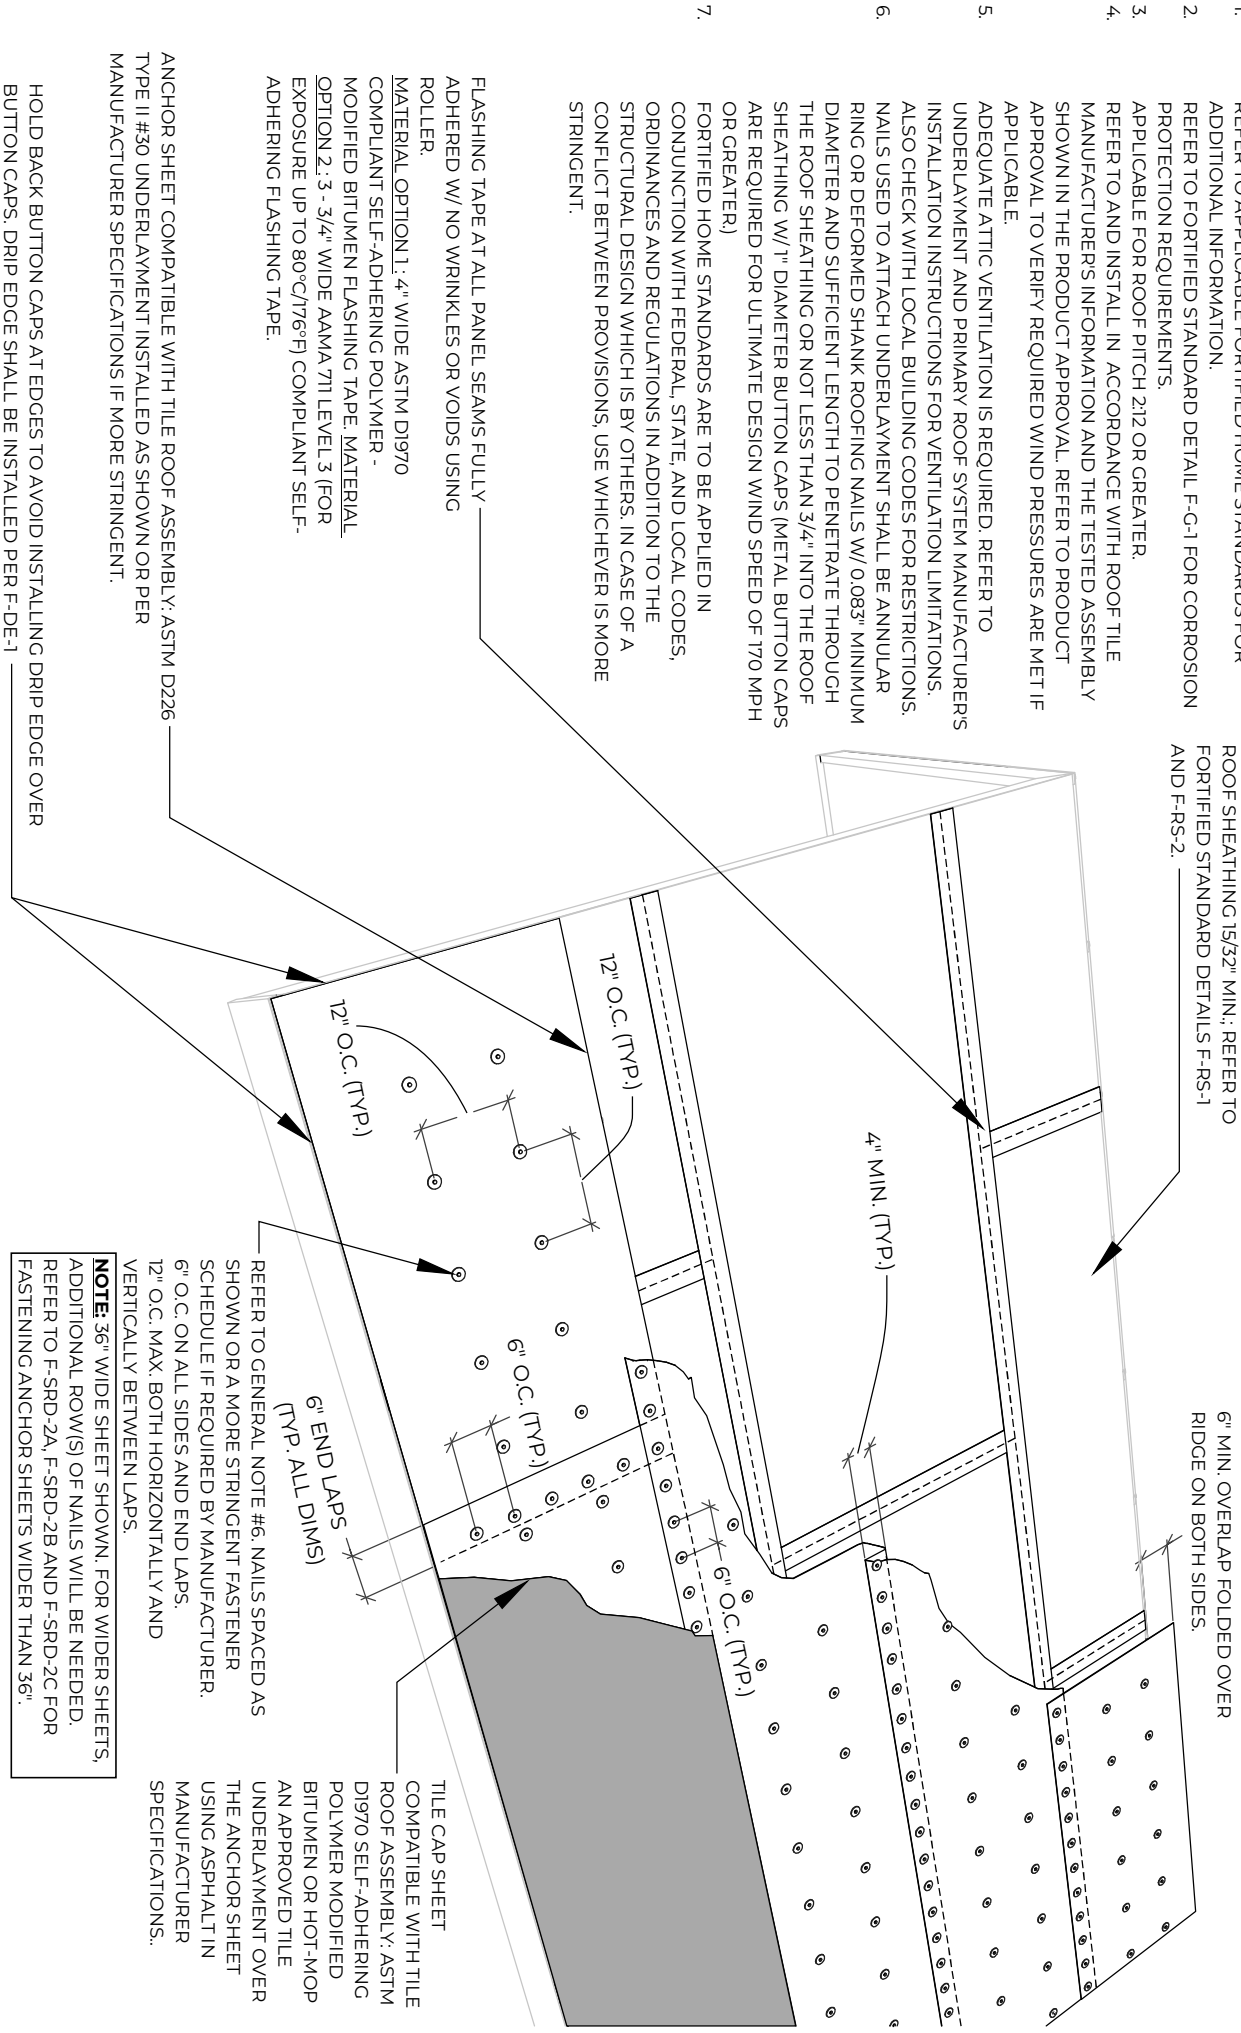

FLASHING TAPE AT ALL PANEL SEAMS FULLY ADHERED W/ NO WRINKLES OR VOIDS USING ROLLER.

MATERIAL OPTION 1: 4" WIDE ASTM D1970 COMPLANT SELF-ADHERING POLYMER - MODIFIED BITUMEN FLASHING TAPE. MATERIAL OPTION 2: 3 - 3/4" WIDE AAMA 711 LEVEL 3 (FOR EXPOSURE UP TO 80°C/176°F) COMPLANT SELF-ADHERING FLASHING TAPE.

ANCHOR SHEET COMPATIBLE WITH TILE ROOF ASSEMBLY: ASTM D226 TYPE II #30 UNDERLAYMENT INSTALLED AS SHOWN OR PER MANUFACTURER SPECIFICATIONS IF MORE STRINGENT.

HOLD BACK BUTTON CAPS AT EDGES TO AVOID INSTALLING DRIP EDGE OVER BUTTON CAPS. DRIP EDGE SHALL BE INSTALLED PER F-DE-1

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

STEEP SLOPE SEALED ROOF DECK -
FLASHING TAPE, UNDERLAYMENT AND
ROOF TILE CAP SHEET - CONCRETE AND
CLAY TILE ROOF COVERS

DRAWING #:

F-SRD-5

DATE:

11/01/2024



- GENERAL NOTES:

1. REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION.

2. APPLICABLE FOR ROOF PITCH 2:12 OR GREATER.

3. REFER TO AND INSTALL IN ACCORDANCE WITH ROOF TILE MANUFACTURER'S INFORMATION AND THE TESTED ASSEMBLY SHOWN IN THE PRODUCT APPROVAL. REFER TO PRODUCT APPROVAL TO VERIFY REQUIRED WIND PRESSURES ARE MET IF APPLICABLE.

4. ADEQUATE ATTIC VENTILATION IS REQUIRED. REFER TO UNDERLAYMENT AND PRIMARY ROOF SYSTEM MANUFACTURERS INSTALLATION INSTRUCTIONS FOR VENTILATION LIMITATIONS. ALSO CHECK WITH LOCAL BUILDING CODES FOR RESTRICTIONS.

5. FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.
- ROOF SHEATHING 15/32" MIN ;
REFER TO FORTIFIED STANDARD
DETAILS F-RS-1 AND F-RS-2.
APPLY MANUFACTURER-SPECIFIED
COMPATIBLE PRIMER TO ROOF
SHEATHING PER MANUFACTURER
INSTALLATION INSTRUCTIONS.
- 4" MIN. SIDELAPS OR GREATER IF
SPECIFIED BY MANUFACTURERS
SPECIFICATIONS AND INSTALLATION
INSTRUCTIONS (SEE GENERAL NOTE #3).
- The diagram illustrates a cross-section of a roof assembly. From top to bottom, the layers are: roof sheathing, a self-adhering polymer-modified bitumen membrane, a self-sealed roof deck, and a concrete and clay tile roof cover. Callouts point to specific details: 'ASTM D1970 SELF-ADHERING POLYMER-MODIFIED BITUMEN MEMBRANE (40 MIL MIN. THICKNESS SBS, APP OR APPROVED EQUAL) COMPATIBLE WITH TILE ROOF ASSEMBLY COVERING ENTIRE ROOF DECK. REFER TO GENERAL NOTES #3 AND #4.' points to the membrane layer; 'REFER TO MANUFACTURER'S SPECIFICATIONS (SEE GENERAL NOTE #3) FOR REQUIRED OVERLAP AND FOLLOW INSTALLATION INSTRUCTIONS.' points to the overlap of the membrane; 'STAGGER AND INSTALL END LAPS AS SPECIFIED PER FRSA/TRI MANUAL (SEE GENERAL NOTE #3).' points to the staggered end laps of the membrane; '4" MIN. SIDELAPS OR GREATER IF SPECIFIED BY MANUFACTURERS SPECIFICATIONS AND INSTALLATION INSTRUCTIONS (SEE GENERAL NOTE #3).' points to the side laps of the membrane; 'ROOF SHEATHING 15/32" MIN ; REFER TO FORTIFIED STANDARD DETAILS F-RS-1 AND F-RS-2. APPLY MANUFACTURER-SPECIFIED COMPATIBLE PRIMER TO ROOF SHEATHING PER MANUFACTURER INSTALLATION INSTRUCTIONS.' points to the roof sheathing; and 'DRIp EDGE SHALL BE INSTALLED PER F-DE-1' points to the drip edge at the eave.
- APPLICABLE STANDARDS:
- FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)
- DESCRIPTION:
- STEEP SLOPE SEALED ROOF DECK - SELF-
ADHERED MEMBRANE - CONCRETE AND CLAY
TILE ROOF COVERS
- DRAWING #:
- F-SRD-6
- DATE:
- 11/01/2024
-

GENERAL NOTES:


1. REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION.
2. REFER TO FORTIFIED STANDARD DETAIL F-C-1 FOR CORROSION PROTECTION REQUIREMENTS.
3. WEAVE UNDERLAYMENT ACROSS VALLEYS.
4. DOUBLE LAP UNDERLAYMENT ACROSS RIDGES (UNLESS THERE IS A CONTINUOUS RIDGE VENT).
5. LAP UNDERLAYMENT WITH MINIMUM 6" LEG. *TURNED UP" AT WALL INTERSECTIONS; LAP WALL WEATHER BARRIER OVER TURNED-UP ROOF UNDERLAYMENT.
6. APPLICABLE FOR ROOF PITCH 2:12 OR GREATER.
7. NAILS USED TO ATTACH UNDERLAYMENT SHALL BE ANNULAR RING OR DEFORMED SHANK ROOFING NAILS W/ 0.083" MINIMUM DIAMETER AND SUFFICIENT LENGTH TO PENETRATE THROUGH THE ROOF SHEATHING OR NOT LESS THAN 3/4" INTO THE ROOF SHEATHING W/ 1" DIAMETER BUTTON CAPS (METAL BUTTON CAPS ARE REQUIRED FOR ULTIMATE DESIGN WIND SPEED OF 170 MPH OR GREATER).
8. FOR WOOD SHAKE AND SHINGLE ROOF COVERS, SYNTHETIC/SELF-ADHERED UNDERLAYMENT IS NOT PERMITTED. REFER TO TECHNICAL BULLETIN FH 2021-03 FOR MORE INFORMATION.
9. FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.

ROOF SHEATHING BY OTHERS. REFER TO FORTIFIED STANDARD DETAILS F-RS-1 AND F-RS-2.

OVERLAP = HALF ROLL WIDTH + 2"
FOR 40" ROLL, **OVERLAP = 22"**
FOR 48" ROLL, **OVERLAP = 26"**

EXPOSURE = HALF ROLL WIDTH - 2"
FOR 40" ROLL, **EXPOSURE = 18"**
FOR 48" ROLL, **EXPOSURE = 22"**

ASTM D8257 SYNTHETIC UNDERLAYMENT
ALT: REINFORCED SYNTHETIC ROOF
UNDERLAYMENT WITH ICC 188
APPROVAL AS ASTM D226 TYPE II;
MINIMUM TEAR STRENGTH = 15 LBF PER
ASTM D4533
MINIMUM TENSILE STRENGTH = 20 PSF
PER ASTM D5035
PASS ASTM D4869 SHOWER TEST
FOR FELT UNDERLAYMENT, REFER TO F-SRD-3.

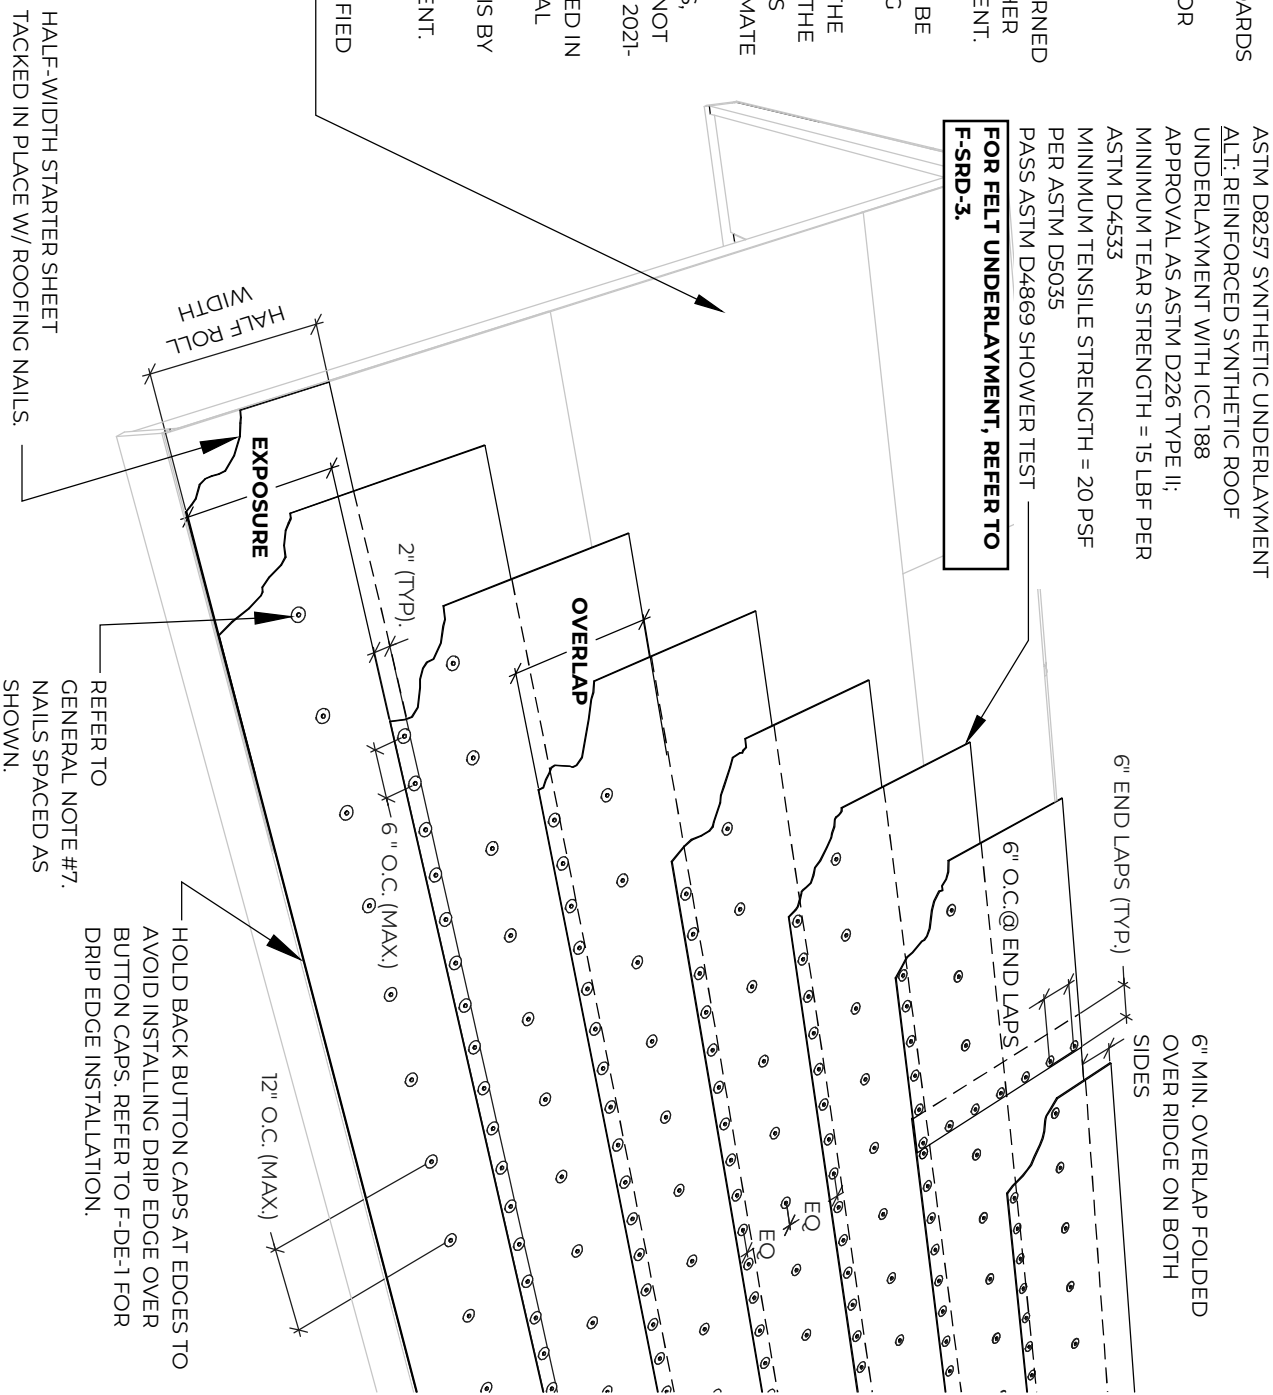

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

STEEP SLOPE SEALED ROOF DECK - TWO
LAYERS **SYNTHETIC** UNDERLAYMENT (**40"**
AND 48" WIDE ROLLS)

DRAWING #:

F-SRD-7


DATE:

11/01/2024



GENERAL NOTES:

1. REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION.
 2. REFER TO FORTIFIED STANDARD DETAIL F-C-1 FOR CORROSION PROTECTION REQUIREMENTS.
 3. WEAVE UNDERLAYMENT ACROSS VALLEYS.
 4. DOUBLE LAP UNDERLAYMENT ACROSS RIDGES (UNLESS THERE IS A CONTINUOUS RIDGE VENT).
 5. LAP UNDERLAYMENT WITH MINIMUM 6" LEG "TURNED UP" AT WALL INTERSECTIONS; LAP WALL WEATHER BARRIER OVER TURNED-UP ROOF UNDERLAYMENT.
 6. APPLICABLE FOR ROOF PITCH 2:12 OR GREATER.
 7. NAILS USED TO ATTACH UNDERLAYMENT SHALL BE ANNULAR RING OR DEFORMED SHANK ROOFING NAILS W/ 0.083" MINIMUM DIAMETER AND SUFFICIENT LENGTH TO PENETRATE THROUGH THE ROOF SHEATHING OR NOT LESS THAN 3/4" INTO THE ROOF SHEATHING W/ 1" DIAMETER BUTTON CAPS (METAL BUTTON CAPS ARE REQUIRED FOR ULTIMATE DESIGN WIND SPEED OF 170 MPH OR GREATER.)
 8. FOR WOOD SHAKE AND SHINGLE ROOF COVERS, SYNTHETIC/SELF-ADHERED UNDERLAYMENT IS NOT PERMITTED. REFER TO TECHNICAL BULLETIN FH 2021-03 FOR MORE INFORMATION.
 9. FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.
- ROOF SHEATHING BY OTHERS ; REFER TO FORTIFIED STANDARD DETAILS F-RS-1 AND F-RS-2
- ASTM D8257 SYNTHETIC UNDERLAYMENT
ALT.: REINFORCED SYNTHETIC ROOF UNDERLAYMENT WITH ICC 188
APPROVAL AS ASTM D226 TYPE II;
MINIMUM TEAR STRENGTH = 15 LBF PER ASTM D4533
MINIMUM TENSILE STRENGTH = 20 PSF PER ASTM D5035
PASS ASTM D4869 SHOWER TEST
- FOR FELT UNDERLAYMENT, REFER TO F-SRD-3**

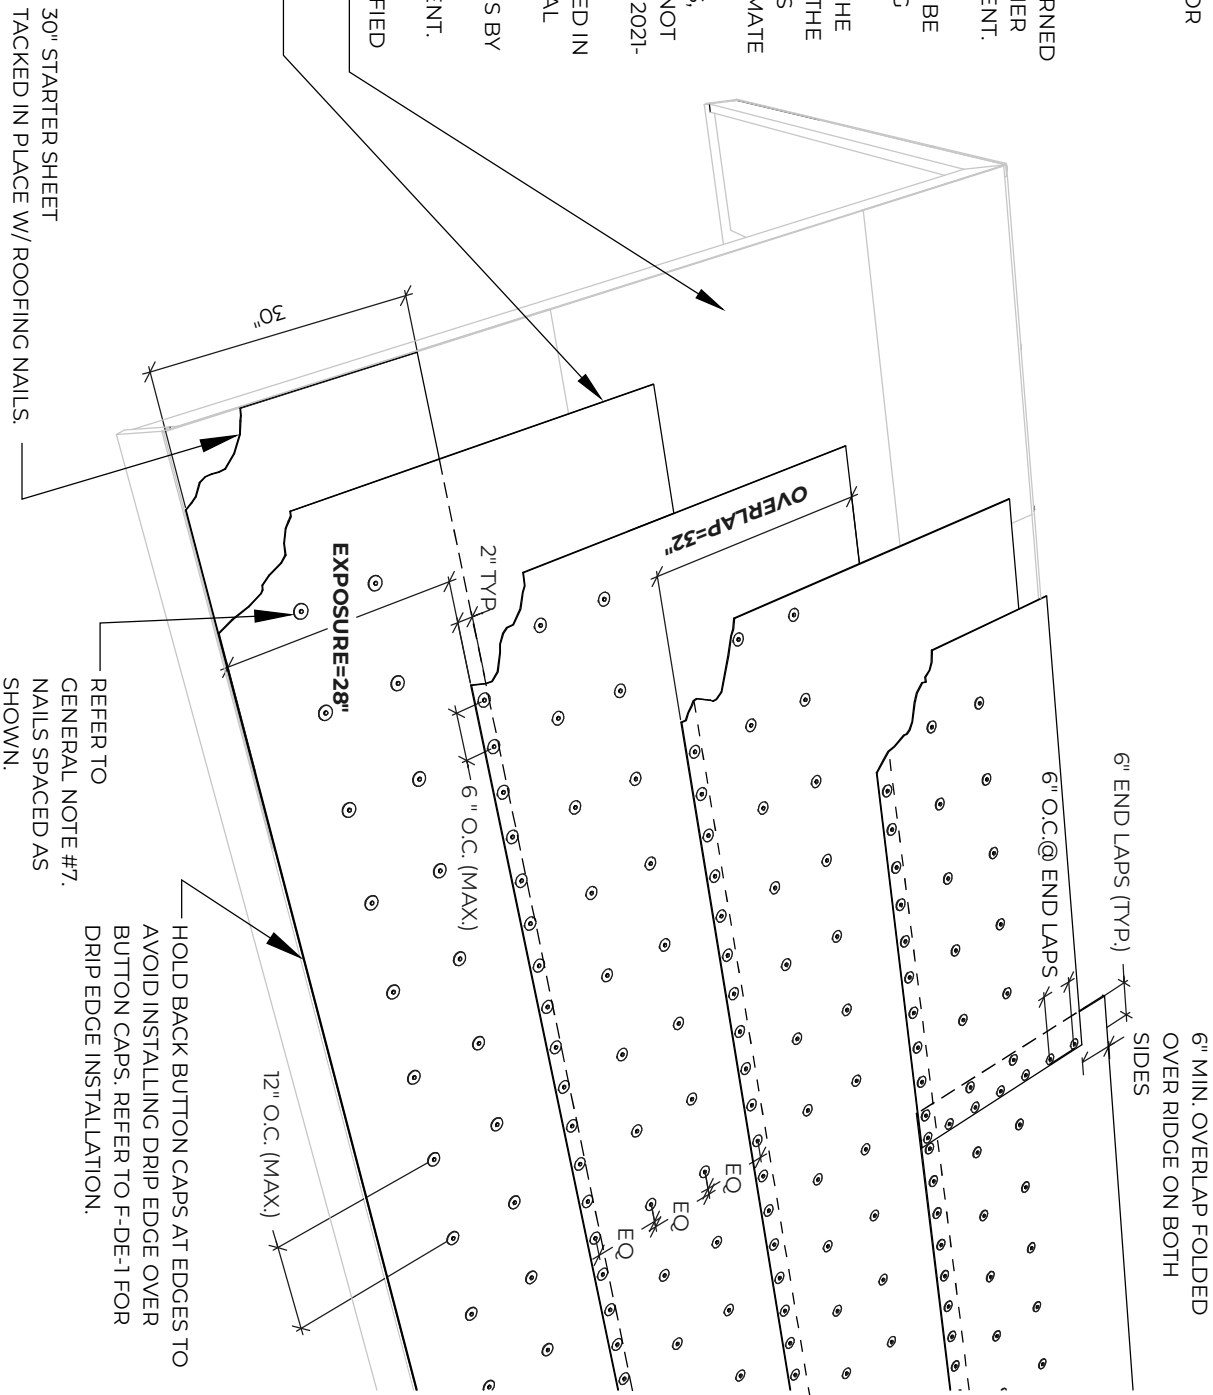

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2025)
FORTIFIED HOME™ - HIGH WIND (2025)

DESCRIPTION:

STEEP SLOPE SEALED ROOF DECK -
TWO LAYERS **SYNTHETIC**
UNDERLAYMENT (**60" WIDE ROLL**)

DRAWING #:

F-SRD-8

DATE:

11/01/2024

